

Laser Blade XS


Design iGuzzini iGuzzini

Design iGuzzini iGuzzini

Last information update: August 2025

Product configuration: QI69

Q169: Ceiling-mounted linear HC - 15 cells - Flood beam



Product code

Q169: Ceiling-mounted linear HC - 15 cells - Flood beam

Technical description

Ceiling-mounted luminaire with 15 optical elements for LED lamps - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient luminous flux and a high level of controlled glare visual comfort. Extruded aluminium main body and technical dissipation unit - shaped steel fixing plate. Integrated DALI dimmable electronic ballast.

Installation

Ceiling-mounted with surface fixing plate (screws and screw anchors not included) - external locking system.

Colour	Weight (Kg)
--------	-------------

White (01) Black / Black (43) Black / White (47)	Weight (kg)
	1.11

Weight (Kg)

1.11

Mounting

ceiling surface

Wiring

Cables supplied with quick-coupling terminals for connecting to power supply line.


Complies with EN60598-1 and pertinent regulations




Technical data

Im system:	2283	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W system:	33.4	Voltage [Vin]:	230
Im source:	2750	Lamp code:	LED
W source:	30	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	68.3	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	83	Inrush current:	5 A / 50 µs
Beam angle [°]:	43°	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 31 luminaires B16A: 50 luminaires C10A: 52 luminaires C16A: 85 luminaires
CRI (minimum):	90	Minimum dimming %:	1
Colour temperature [K]:	2700	Overvoltage protection:	4kV Common mode & 3kV Differential mode
MacAdam Step:	2	Control:	DALI-2

Polar

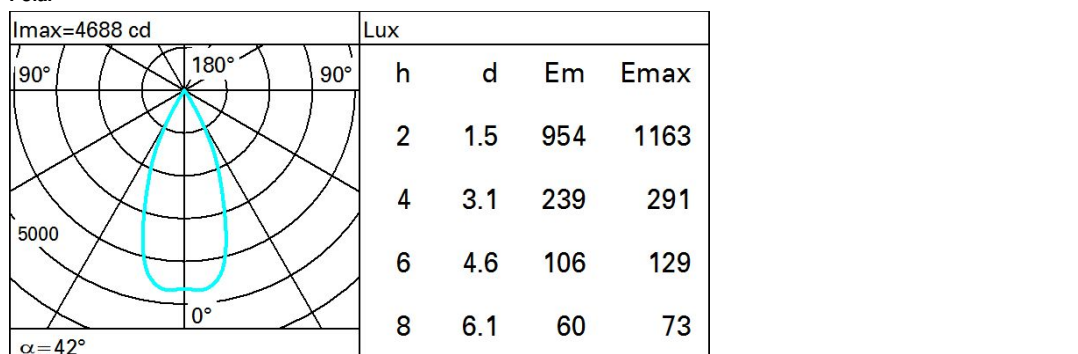

Isolux

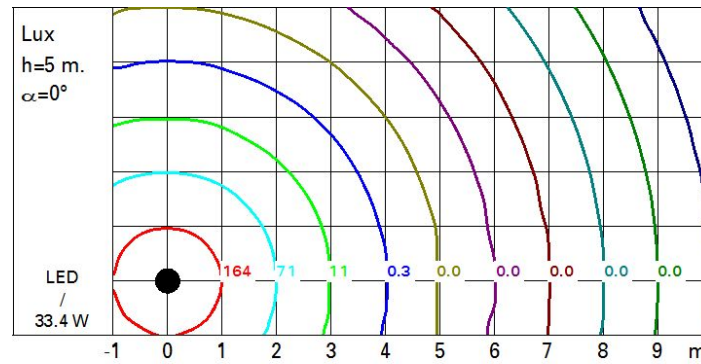

UGR diagram

Corrected UGR values (at 2750 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	7.2	7.7	7.5	7.9	8.1	7.2	7.7	7.5	7.9	8.1
	3H	7.1	7.5	7.4	7.8	8.0	7.1	7.5	7.4	7.8	8.0
	4H	7.0	7.4	7.3	7.7	8.0	7.0	7.4	7.3	7.7	8.0
	6H	6.9	7.3	7.3	7.6	7.9	6.9	7.3	7.3	7.6	7.9
	8H	6.9	7.3	7.3	7.6	7.9	6.9	7.3	7.3	7.6	7.9
	12H	6.9	7.2	7.2	7.6	7.9	6.9	7.2	7.2	7.5	7.9
4H	2H	7.0	7.4	7.3	7.7	8.0	7.0	7.4	7.3	7.7	8.0
	3H	6.9	7.2	7.2	7.5	7.9	6.9	7.2	7.2	7.5	7.9
	4H	6.8	7.1	7.2	7.4	7.8	6.8	7.1	7.2	7.4	7.8
	6H	6.7	7.0	7.1	7.4	7.8	6.7	7.0	7.1	7.3	7.8
	8H	6.6	6.9	7.1	7.3	7.7	6.6	6.9	7.1	7.3	7.7
	12H	6.6	6.8	7.1	7.3	7.7	6.6	6.8	7.0	7.2	7.7
8H	4H	6.6	6.9	7.1	7.3	7.7	6.6	6.9	7.1	7.3	7.7
	6H	6.5	6.8	7.0	7.2	7.7	6.6	6.8	7.0	7.2	7.7
	8H	6.5	6.7	7.0	7.1	7.6	6.5	6.7	7.0	7.1	7.6
	12H	6.5	6.6	7.0	7.1	7.6	6.5	6.6	7.0	7.1	7.6
12H	4H	6.6	6.8	7.0	7.2	7.7	6.6	6.8	7.1	7.3	7.7
	6H	6.5	6.7	7.0	7.1	7.6	6.5	6.7	7.0	7.2	7.6
	8H	6.5	6.6	7.0	7.1	7.6	6.5	6.6	7.0	7.1	7.6
Variations with the observer position at spacing:											
S = 1.0H		7.0 / -14.5					7.0 / -14.5				
1.5H		9.8 / -14.7					9.8 / -14.7				
2.0H		11.8 / -14.8					11.8 / -14.8				