

Glim Cube


Design Piero
Castiglioni

iGuzzini

Last information update: October 2023

Product configuration: BA97

BA97: Applique white 12Vdc L



Product code

BA97: Applique white 12Vdc L **Attention! Code no longer in production**

Technical description

Wall- or ceiling-mounted luminaire designed to use white LED light sources with blade-of-light optic. The product is made up of a support base and a screen. The base is made of die-cast aluminium EN1706AC 46100LF and is subjected to a phosphochromatisation process with double primer and 120°C passivation. The liquid acrylic paint is baked at 150°C and ensures high resistance to the external environment and UV rays. The screen is made of ribbed polymethyl-methacrylate. The wall-anchoring plate is made of stainless steel and has dowels M5x10. All screws are made of stainless steel (A2). The product comes complete with the lamp.

Installation

Wall and ceiling installation.

Colour

Grey (15)

Mounting

wall surface|ceiling surface

Wiring

Electronic ballast to be ordered separately.

Notes

Complete with lamp. On request available with LED cool white (6700K), red, green and amber.

Complies with EN60598-1 and pertinent regulations




650°C

IK04

IP66


ERC



Technical data

Im system:	127	MacAdam Step:	4
W system:	3.8	Life Time LED 1:	50,000h - L70 - B20 (Ta 25°C)
Im source:	270	Ballast losses [W]:	0.3
W source:	3.5	Voltage [Vin]:	12
Luminous efficiency (Im/W, real value):	33.5	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	47	Number of optical assemblies:	1
CRI (minimum):	75	Intervallo temperatura ambiente:	from -20°C to +35°C.
Colour temperature [K]:	4200	LED current [mA]:	350

Polar

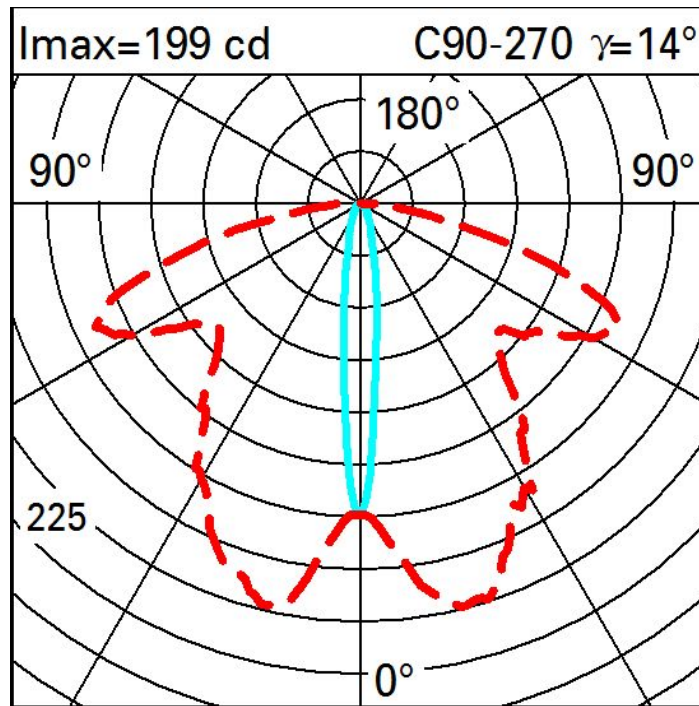

Isolux

