

Mini Reglette


Design iGuzzini

iGuzzini

Last information update: September 2020

Product configuration: 5285+L105

5285: 35WDALI

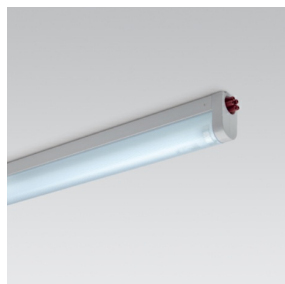

Product code

5285: 35WDALI **Attention! Code no longer in production**

Technical description

High output luminaire for general lighting designed to use T16 fluorescent lamps. Extruded aluminium component-holding box. Polycarbonate standard protective screen. Joints for direct electric and mechanical connection included with the product. Simplified installation and maintenance. Ceiling/wall mounting kit included with the product. T16 fluorescent lamp included with colour temperature 4000°K.

Installation

Ceiling- and wall-mounted.

Colour

White (01)

Mounting

wall surface|ceiling surface

Wiring

The luminaire has a DALI electronic ballast

Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	2337	Colour temperature [K]:	6500
W system:	40	Ballast losses [W]:	5
Im source:	3050	Voltage [Vin]:	230
W source:	35	Lamp code:	L105
Luminous efficiency (Im/W, real value):	58.4	Socket:	G5
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	717	ZVEI Code:	T 16
Light Output Ratio (L.O.R.) [%]:	77	Number of optical assemblies:	1
CRI:	86	Control:	DALI


Polar

	Lux				
	h	d1	d2	Em	Emax
	1	-	2.5	131	312
	2	-	4.9	33	78
	3	-	7.4	15	35
	4	-	9.9	8	19

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	40	32	26	21	28	23	21	13	25
1.0	45	36	30	26	32	27	24	16	31
1.5	52	45	39	34	40	35	31	22	42
2.0	56	50	45	40	45	40	36	27	51
2.5	59	54	49	45	48	44	40	30	57
3.0	61	56	52	48	50	47	42	33	61
4.0	64	60	56	53	54	51	46	36	68
5.0	66	62	59	56	56	53	48	38	72

Luminance curve limit

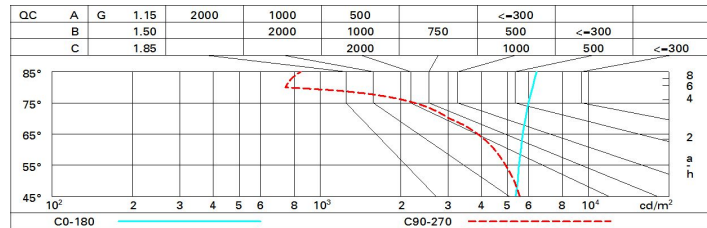

UGR diagram

Corrected UGR values (at 3050 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
2H	2H	17.4	18.3	18.1	19.1	20.0	14.1	15.1	14.9	15.8	16.7
	3H	20.0	20.9	20.8	21.7	22.6	15.1	16.0	15.9	16.8	17.7
	4H	21.4	22.2	22.1	23.0	23.9	15.7	16.5	16.5	17.3	18.3
	6H	22.7	23.5	23.5	24.3	25.3	16.1	16.9	16.9	17.7	18.7
	8H	23.4	24.1	24.2	24.9	25.9	16.3	17.0	17.1	17.9	18.9
	12H	24.0	24.7	24.8	25.5	26.5	16.4	17.1	17.2	17.9	18.9
4H	2H	17.9	18.8	18.7	19.6	20.5	15.7	16.5	16.4	17.3	18.2
	3H	20.8	21.6	21.6	22.4	23.4	17.0	17.7	17.8	18.5	19.5
	4H	22.4	23.0	23.2	23.8	24.9	17.8	18.5	18.7	19.3	20.3
	6H	23.9	24.5	24.7	25.3	26.4	18.7	19.3	19.6	20.2	21.2
	8H	24.7	25.2	25.5	26.1	27.1	19.2	19.7	20.0	20.6	21.6
	12H	25.4	25.9	26.3	26.8	27.8	19.5	20.0	20.4	20.9	21.9
8H	4H	22.7	23.2	23.5	24.1	25.1	18.3	18.9	19.2	19.7	20.8
	6H	24.5	24.9	25.4	25.8	26.9	19.6	20.0	20.4	20.9	22.0
	8H	25.4	25.8	26.3	26.7	27.8	20.3	20.7	21.2	21.6	22.7
	12H	26.4	26.7	27.2	27.6	28.7	21.1	21.4	22.0	22.3	23.4
12H	4H	22.7	23.2	23.5	24.0	25.1	18.4	18.9	19.2	19.7	20.8
	6H	24.6	25.0	25.4	25.9	27.0	19.7	20.1	20.6	21.0	22.1
	8H	25.6	25.9	26.5	26.8	28.0	20.5	20.9	21.4	21.8	22.9
Variations with the observer position at spacing:											
S =		1.0H	0.1 / -0.1				0.1 / -0.0				
		1.5H	0.2 / -0.2				0.2 / -0.2				
		2.0H	0.2 / -0.3				0.3 / -0.4				