


Last information update: December 2023

**Product configuration: E197**

E197: Spotlight with base - Warm White Led - integrated electronic control gear - Spot optic



**Product code**

E197: Spotlight with base - Warm White Led - integrated electronic control gear - Spot optic

**Technical description**

Spotlight designed to use LED lamps and a spot optic. Consists of an optical assembly and a base. The optical assembly, arm, base and frame holder are made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. The 4 mm thick, tempered, sodium-calcium, closing glass is colourless, transparent and secured with captive screws. The 50/60 Shore A silicone seal has been subject to post-cooling treatment, in an oven, for 4-6 hours at 200 °C. The optical assembly allows vertical and horizontal adjustments, with the possibility of locking the adjustment for aiming, and it has slots in the frame for rainwater drainage. Optic with an interchangeable PMMA lens complete with captive screws. Complete with Warm White colour monochrome LED circuit. The cable gland for connecting the wiring assembly to the lamp assembly is made of M11x1 stainless steel. For the power supply, the device is fitted with a black polyamide PG11 cable gland, suitable for 6.5 to 11.5 mm cables. All external screws used are made of A2 stainless steel.

**Installation**

The luminaire can be floor, ceiling or wall-mounted using either screw anchors for concrete, cement and solid brick or various other available accessories.

**Colour**

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

**Weight (Kg)**

1.05

**Mounting**

wall arm|wall surface|ground anchored|ground spike|ceiling surface

**Wiring**

Control gear complete with electronic ballast (220÷240Vac 50/60Hz)

Complies with EN60598-1 and pertinent regulations




**Technical data**

Im system:	655	Life Time LED 1:	98,000h - L80 - B10 (Ta 25°C)
W system:	10.7	Life Time LED 2:	99,000h - L80 - B10 (Ta 40°C)
Im source:	850	Ballast losses [W]:	2.8
W source:	7.9	Lamp code:	LED
Luminous efficiency (Im/W, real value):	61.2	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	77	Intervallo temperatura ambiente:	from -30°C to 50°C.
Beam angle [°]:	8°	Power factor:	See installation instructions
CRI (minimum):	80	Inrush current:	27 A / 250 µs
Colour temperature [K]:	3000	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 17 luminaires B16A: 27 luminaires C10A: 28 luminaires C16A: 45 luminaires
MacAdam Step:	2	Overvoltage protection:	2kV Common mode & 1kV Differential mode

**Polar**

Imax=14611 cd	Lux			
	h	d	Em	Emax
	8	1.1	173	228
	16	2.2	43	57
	24	3.4	19	25
	32	4.5	11	14

**Isolux**

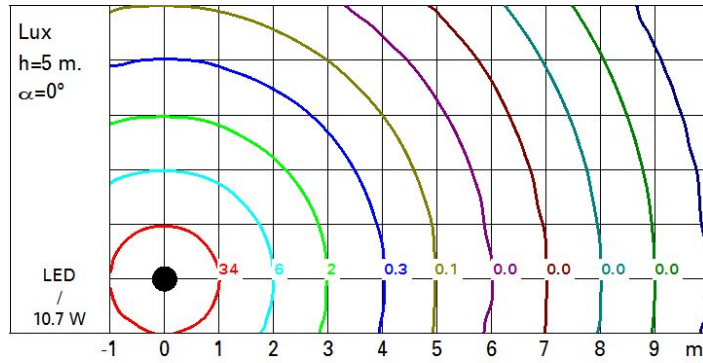

**UGR diagram**

Corrected UGR values (at 850 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	7.1	9.1	7.5	9.4	9.7	7.1	9.1	7.5	9.4	9.7
	3H	7.1	8.3	7.5	8.6	9.0	7.1	8.3	7.4	8.6	8.9
	4H	7.1	8.0	7.4	8.3	8.6	7.1	8.0	7.4	8.3	8.6
	6H	7.1	7.7	7.4	8.0	8.4	7.0	7.7	7.4	8.0	8.4
	8H	7.0	7.8	7.4	8.1	8.4	7.0	7.7	7.3	8.1	8.4
	12H	6.9	7.8	7.3	8.2	8.5	6.9	7.8	7.3	8.1	8.5
4H	2H	7.1	8.0	7.4	8.3	8.6	7.1	8.0	7.4	8.3	8.6
	3H	7.0	7.9	7.4	8.2	8.6	7.0	7.9	7.4	8.2	8.6
	4H	6.8	8.0	7.2	8.4	8.8	6.8	8.0	7.2	8.4	8.8
	6H	6.5	8.2	7.0	8.7	9.1	6.5	8.2	7.0	8.7	9.1
	8H	6.4	8.2	6.9	8.7	9.2	6.4	8.2	6.9	8.7	9.2
	12H	6.3	8.2	6.8	8.6	9.2	6.3	8.2	6.8	8.6	9.1
8H	4H	6.4	8.2	6.9	8.7	9.2	6.4	8.2	6.9	8.7	9.2
	6H	6.3	7.9	6.8	8.4	8.9	6.3	7.9	6.8	8.4	8.9
	8H	6.4	7.6	6.9	8.1	8.6	6.4	7.6	6.9	8.1	8.6
	12H	6.6	7.2	7.1	7.7	8.2	6.6	7.2	7.1	7.7	8.2
12H	4H	6.3	8.2	6.8	8.6	9.1	6.3	8.2	6.8	8.6	9.2
	6H	6.4	7.6	6.9	8.1	8.6	6.4	7.6	6.9	8.1	8.6
	8H	6.6	7.2	7.1	7.7	8.2	6.6	7.2	7.1	7.7	8.2
Variations with the observer position at spacing:											
S =	1.0H	5.0 / -5.5					5.0 / -5.5				
	1.5H	7.7 / -7.0					7.7 / -7.0				
	2.0H	9.7 / -8.5					9.7 / -8.5				