




Wirkungsgrad

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	66	63	61	65	63	63	60	78
1.0	73	69	67	65	69	66	66	64	83
1.5	76	74	72	70	73	71	70	68	89
2.0	78	77	75	74	76	74	74	71	93
2.5	80	79	78	77	77	77	76	74	96
3.0	81	80	79	78	79	78	77	75	98
4.0	82	81	81	80	80	79	78	76	99
5.0	82	82	81	81	81	80	79	77	100

Söllner-Diagramm

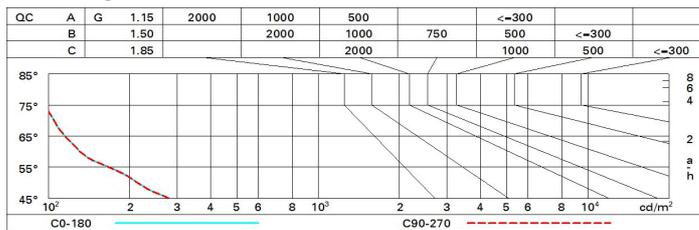

UGR-Diagramm

Corrected UGR values (at 8200 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	14.9	15.5	15.1	15.7	15.9	14.9	15.5	15.1	15.7	15.9
	3H	14.7	15.3	15.0	15.5	15.8	14.7	15.3	15.0	15.5	15.8
	4H	14.7	15.2	15.0	15.4	15.7	14.7	15.2	15.0	15.4	15.7
	6H	14.6	15.0	14.9	15.3	15.7	14.6	15.0	14.9	15.3	15.7
	8H	14.5	15.0	14.9	15.3	15.6	14.5	15.0	14.9	15.3	15.6
	12H	14.5	14.9	14.9	15.3	15.6	14.5	14.9	14.9	15.3	15.6
4H	2H	14.7	15.2	15.0	15.4	15.7	14.7	15.2	15.0	15.4	15.7
	3H	14.5	14.9	14.9	15.3	15.6	14.5	14.9	14.9	15.3	15.6
	4H	14.4	14.8	14.8	15.2	15.5	14.4	14.8	14.8	15.2	15.5
	6H	14.3	14.6	14.7	15.0	15.5	14.3	14.6	14.7	15.0	15.5
	8H	14.3	14.6	14.7	15.0	15.4	14.3	14.6	14.7	15.0	15.4
	12H	14.2	14.5	14.7	14.9	15.4	14.2	14.5	14.7	14.9	15.4
8H	4H	14.3	14.6	14.7	15.0	15.4	14.3	14.6	14.7	15.0	15.4
	6H	14.2	14.4	14.6	14.9	15.3	14.2	14.4	14.6	14.9	15.3
	8H	14.1	14.3	14.6	14.8	15.3	14.1	14.3	14.6	14.8	15.3
	12H	14.1	14.3	14.6	14.7	15.3	14.1	14.3	14.6	14.7	15.3
12H	4H	14.2	14.5	14.7	14.9	15.4	14.2	14.5	14.7	14.9	15.4
	6H	14.1	14.3	14.6	14.8	15.3	14.1	14.3	14.6	14.8	15.3
	8H	14.1	14.3	14.6	14.7	15.3	14.1	14.3	14.6	14.7	15.3
Variations with the observer position at spacing:											
S =	1.0H	6.5 / -24.8					6.5 / -24.8				
	1.5H	9.4 / -25.4					9.4 / -25.4				
	2.0H	11.4 / -25.8					11.4 / -25.8				