


Design iGuzzini iGuzzini

Product configuration: MK87
MK87: Spotlight - Large body - LED Warm White - Electronic ballast - Flood Optic



MK87: Spotlight - Large body - LED Warm White - Electronic ballast - Flood Optic **Attention! Code no longer in production**

Adjustable spotlight with adapter for installation on a mains voltage track. Luminaire made of die-cast aluminium. Spotlight double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Mechanical aiming locks both for rotation about the vertical axis and tilting relative to the horizontal plane. Equipped with ballast. The luminaire comes complete with LED unit with spot optic in a warm white tone.

On an electrified track

Weight (Kg)

three circuit track

Electronic components housed in the luminaire

Complies with EN60598-1 and pertinent regulations




Im system:	4024	CRI (minimum):	80
W system:	35.5	Colour temperature [K]:	3000
Im source:	5100	MacAdam Step:	2
W source:	33	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	113.4	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	48°		

	CIE nL 0.79 98-100-100-100-79 UGR 10.6-10.5 DIN A.61 UTE 0.79A+0.00T F*1=984 F*1+F*2=996 F*1+F*2+F*3=999				Lux			
	CIBSE LG3 Lc:3000 cd/m² at 65° UGR<16 Lc:3000 cd/mq @65°				h	d	Em	Emax
					2	1.8	1455	1870
					4	3.6	364	468
					6	5.3	162	208
α=48°					8	7.1	91	117

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	67	64	62	66	64	64	61	77
1.0	74	71	68	66	70	68	67	65	82
1.5	78	75	73	72	74	72	72	69	88
2.0	80	78	77	76	77	76	75	73	92
2.5	82	80	79	78	79	78	77	75	95
3.0	83	82	81	80	80	80	79	77	97
4.0	84	83	82	82	82	81	80	78	99
5.0	84	84	83	83	82	82	81	79	100

Luminance curve limit

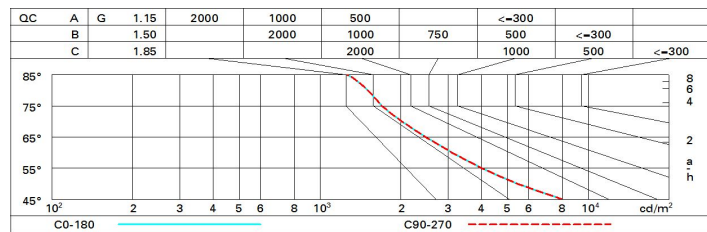

UGR diagram

Corrected UGR values (at 5100 lm bare lamp luminous flux)											
Reflect.: ceil/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	10.6	11.2	10.9	11.5	11.7	10.6	11.2	10.9	11.5	11.7
	3H	10.7	11.2	11.0	11.5	11.8	10.6	11.1	10.9	11.4	11.7
	4H	10.7	11.2	11.0	11.5	11.8	10.5	11.0	10.9	11.3	11.6
	6H	10.6	11.1	11.0	11.4	11.7	10.5	10.9	10.8	11.3	11.6
	8H	10.6	11.1	11.0	11.4	11.7	10.4	10.9	10.8	11.2	11.6
	12H	10.6	11.0	11.0	11.4	11.7	10.4	10.8	10.8	11.2	11.5
4H	2H	10.5	11.0	10.9	11.3	11.6	10.7	11.2	11.0	11.5	11.8
	3H	10.6	11.0	11.0	11.4	11.7	10.6	11.1	11.0	11.4	11.8
	4H	10.6	11.0	11.0	11.4	11.7	10.6	11.0	11.0	11.4	11.7
	6H	10.6	11.0	11.0	11.4	11.8	10.6	10.9	11.0	11.3	11.7
	8H	10.6	10.9	11.1	11.3	11.8	10.5	10.8	11.0	11.3	11.7
	12H	10.6	10.9	11.0	11.3	11.8	10.5	10.8	11.0	11.2	11.7
8H	4H	10.5	10.8	11.0	11.3	11.7	10.6	10.9	11.1	11.3	11.8
	6H	10.6	10.8	11.0	11.3	11.8	10.6	10.9	11.1	11.3	11.8
	8H	10.6	10.8	11.1	11.3	11.8	10.6	10.8	11.1	11.3	11.8
	12H	10.6	10.8	11.1	11.2	11.8	10.6	10.7	11.1	11.2	11.7
12H	4H	10.5	10.8	11.0	11.2	11.7	10.6	10.9	11.0	11.3	11.8
	6H	10.5	10.8	11.0	11.2	11.7	10.6	10.8	11.1	11.3	11.8
	8H	10.6	10.7	11.1	11.2	11.7	10.6	10.8	11.1	11.2	11.8
Variations with the observer position at spacing:											
S =	1.0H	4.7 / -3.9					4.7 / -3.9				
	1.5H	7.4 / -4.8					7.4 / -4.8				
	2.0H	9.3 / -5.4					9.3 / -5.4				