

## Laser Blade XS



Design iGuzzini

iGuzzini

Last information update: June 2025

### Product configuration: RA93

RA93: Minimal 5 cells - Wide Flood beam - LED



### Product code

RA93: Minimal 5 cells - Wide Flood beam - LED

### Technical description

Linear miniaturised recessed luminaire with 5 optical elements for LED lamps - fixed optic. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient luminous flux and a high level of controlled glare visual comfort. Main body with die-cast aluminium radiant surface, minimal (frameless) version for mounting flush with the ceiling. For recessed installation in a false ceiling a specific adapter is required that is available with a separate item code. Metallised, thermoplastic, high definition Opti Beam reflector, integrated in a set-back position in the anti-glare screen. Supplied with a power supply unit connected to the luminaire.

### Installation

The luminaire is recessed in the specific adapter (QJ90) by means of a steel wire spring, previously installed on the ceiling that can be 12.5 / 15 / 20 mm thick. A special protective sheath allows finishing operations on the plasterboard to be simplified and speeded up.

### Weight (Kg)

0.32

### Mounting

wall recessed/ceiling recessed

### Wiring

On the power supply unit with terminal board included.

### Notes

The special steel wire spring provided is required to facilitate the eventual extraction of the recessed body once it has been inserted.


Complies with EN60598-1 and pertinent regulations



### Technical data

Im system:	805	CRI (minimum):	90
W system:	12.7	Colour temperature [K]:	3500
Im source:	970	MacAdam Step:	2
W source:	9.9	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	63.4	Voltage [Vin]:	230
Im in emergency mode:	-	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of lamps for optical assembly:	1
Light Output Ratio (L.O.R.) [%]:	83	ZVEI Code:	LED
Beam angle [°]:	58°	Number of optical assemblies:	1


### Polar

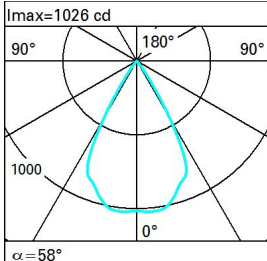		<b>CIE</b> nL 0.83 100-100-100-100-83 UGR 16.6-16.6 <b>DIN</b> A.61 <b>UTE</b> 0.83A+0.00T F*1=996 F*1+F*2=1000 F*1+F*2+F*3=1000 <b>CIBSE</b> LG3 L<1500 cd/m² at 65° UGR<19   L<1500 cd/mq @65°	<b>Lux</b>			
h	d	Em	E <sub>max</sub>			
1	1.1	816	1018			
2	2.2	204	254			
3	3.3	91	113			
4	4.4	51	64			

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	79	77	76	78	77	76	73	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	86	85	83	100

# Luminance curve limit

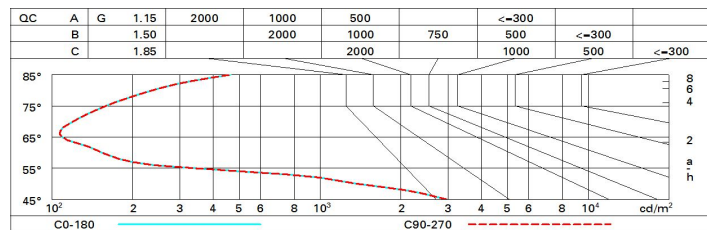

# UGR diagram

Corrected UGR values (at 970 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	17.2	17.7	17.5	17.9	18.1	17.2	17.7	17.5	17.9	18.1
	3H	17.1	17.5	17.4	17.8	18.0	17.1	17.5	17.4	17.8	18.0
	4H	17.0	17.4	17.3	17.7	18.0	17.0	17.4	17.3	17.7	18.0
	6H	16.9	17.3	17.3	17.6	17.9	16.9	17.3	17.3	17.6	17.9
	8H	16.9	17.3	17.3	17.6	17.9	16.9	17.3	17.3	17.6	17.9
	12H	16.9	17.2	17.2	17.5	17.9	16.9	17.2	17.2	17.5	17.9
4H	2H	17.0	17.4	17.3	17.7	18.0	17.0	17.4	17.3	17.7	18.0
	3H	16.9	17.2	17.2	17.5	17.9	16.9	17.2	17.2	17.5	17.9
	4H	16.8	17.1	17.2	17.4	17.8	16.8	17.1	17.2	17.4	17.8
	6H	16.7	17.0	17.1	17.3	17.8	16.7	17.0	17.1	17.3	17.8
	8H	16.6	16.9	17.1	17.3	17.7	16.6	16.9	17.1	17.3	17.7
	12H	16.6	16.8	17.0	17.2	17.7	16.6	16.8	17.0	17.2	17.7
8H	4H	16.6	16.9	17.1	17.3	17.7	16.6	16.9	17.1	17.3	17.7
	6H	16.5	16.7	17.0	17.2	17.7	16.5	16.7	17.0	17.2	17.7
	8H	16.5	16.7	17.0	17.1	17.6	16.5	16.7	17.0	17.1	17.6
	12H	16.4	16.6	16.9	17.1	17.6	16.4	16.6	16.9	17.1	17.6
12H	4H	16.6	16.8	17.0	17.2	17.7	16.6	16.8	17.0	17.2	17.7
	6H	16.5	16.7	17.0	17.1	17.6	16.5	16.7	17.0	17.1	17.6
	8H	16.4	16.6	16.9	17.1	17.6	16.4	16.6	16.9	17.1	17.6
Variations with the observer position at spacing:											
S =	1.0H	6.5 / -24.9					6.5 / -24.9				
	1.5H	9.4 / -25.6					9.4 / -25.6				
	2.0H	11.4 / -25.8					11.4 / -25.8				