

Last information update: May 2025

Product configuration: UF06.15

UF06.15: 27 Surface Full Remote - Neutral White - 48 Vdc - L=1216mm - Flood optic - 15.3W 1534lm - 4000K - Grey

**Product code**

UF06.15: 27 Surface Full Remote - Neutral White - 48 Vdc - L=1216mm - Flood optic - 15.3W 1534lm - 4000K - Grey

Technical description

Direct light linear luminaire, designed to use monochrome LED lamps. The product can be installed using pairs of arms, ceiling/ground/wall-mounting bases, stakes, and pendant rods and cables (to be ordered separately). The body is made of extruded aluminium and includes die-cast aluminium end caps with 50/60 Shore A silicone seals. It is subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. The top of the optical assembly is closed by a 5mm thick transparent glass screen, fixed with silicone. Complete with Neutral White multi-LED circuit. Both the 48Vdc control card (available in a DMX version and a DALI version) and the power supply must be purchased separately. Supplied with a connector with an IP68 threaded locknut. The products have a double connector (male/female) to allow pass-through wiring and continuous line applications. The product is supplied with a closure cover (UV-resistant) that covers the cables and protects against dirt and UV rays. Fitted with an Opti Beam Reflector optical system with a Flood optic. All external screws used are made of A2 stainless steel.

Installation

Installation accessories can be purchased separately, including arms for wall installations at a height of less than 3m, arms for wall installations at a height of more than 3m, bases for ceiling or wall-mounted installations, stakes, and pendant rods and cables.

Colour

Grey (15)

Weight (Kg)

1.38

Mounting

wall arm|wall surface|ceiling surface

Wiring

Ceiling, wall, surface, stake and pendant installation.

Notes

Supplied with a connector with an IP68 threaded locknut. The products have a double connector (male/female) to allow pass-through wiring and continuous line applications. Both the control card and power supply are remote and must be purchased separately.

Complies with EN60598-1 and pertinent regulations



IK06

IP66


**Technical data**

lm system:	1534	MacAdam Step:	3
W system:	15.3	Life Time LED 1:	100,000h - L85 - B10 (Ta 25°C)
lm source:	2360	Life Time LED 2:	100,000h - L85 - B10 (Ta 40°C)
W source:	12	Voltage [Vin]:	48
Luminous efficiency (lm/W, real value):	100.3	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	65	Number of optical assemblies:	1
Beam angle [°]:	34°	Intervallo temperatura ambiente:	from -30°C to 50°C.
CRI (minimum):	80	LED current [mA]:	40
Colour temperature [K]:	4000	Control:	PWM

Polar

Imax=4922 cd		C5-185		Lux	
h	d1	d2	Em	Emax	
2	1.2	1.2	947	1229	
4	2.4	2.4	237	307	
6	3.6	3.7	105	137	
8	4.9	4.9	59	77	

Isolux

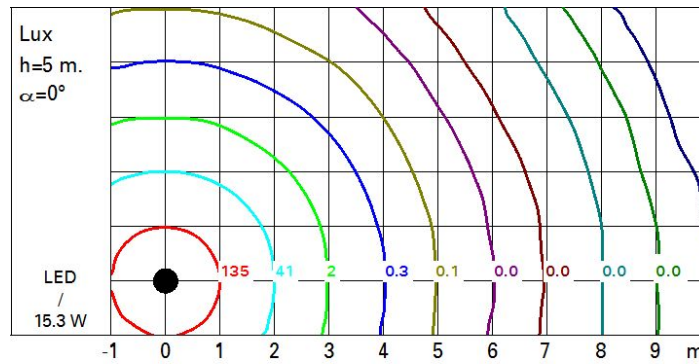

UGR diagram

Corrected UGR values (at 2300 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	-4.7	-4.2	-4.4	-4.0	-3.7	-4.5	-4.0	-4.2	-3.7	-3.5
	3H	-4.6	-4.1	-4.3	-3.9	-3.6	-4.5	-4.0	-4.2	-3.8	-3.5
	4H	-4.6	-4.1	-4.3	-3.9	-3.6	-4.5	-4.1	-4.2	-3.8	-3.5
	6H	-4.6	-4.2	-4.2	-3.9	-3.5	-4.6	-4.2	-4.2	-3.9	-3.6
	8H	-4.6	-4.2	-4.2	-3.9	-3.5	-4.6	-4.2	-4.3	-3.9	-3.6
	12H	-4.6	-4.2	-4.2	-3.9	-3.5	-4.7	-4.3	-4.3	-4.0	-3.6
4H	2H	-4.7	-4.3	-4.4	-4.0	-3.7	-4.3	-3.8	-3.9	-3.5	-3.2
	3H	-4.6	-4.2	-4.2	-3.9	-3.5	-4.2	-3.8	-3.8	-3.5	-3.1
	4H	-4.5	-4.2	-4.1	-3.8	-3.5	-4.2	-3.9	-3.8	-3.5	-3.1
	6H	-4.5	-4.2	-4.1	-3.8	-3.4	-4.2	-3.9	-3.8	-3.6	-3.1
	8H	-4.5	-4.2	-4.0	-3.8	-3.4	-4.3	-4.0	-3.8	-3.6	-3.2
	12H	-4.5	-4.2	-4.0	-3.8	-3.4	-4.3	-4.1	-3.9	-3.6	-3.2
8H	4H	-4.6	-4.3	-4.1	-3.9	-3.5	-4.0	-3.7	-3.6	-3.3	-2.9
	6H	-4.5	-4.3	-4.0	-3.8	-3.4	-4.0	-3.8	-3.5	-3.3	-2.8
	8H	-4.5	-4.3	-4.0	-3.8	-3.3	-4.0	-3.8	-3.5	-3.3	-2.8
	12H	-4.4	-4.3	-3.9	-3.8	-3.3	-4.0	-3.8	-3.5	-3.3	-2.8
12H	4H	-4.6	-4.4	-4.2	-4.0	-3.5	-4.0	-3.7	-3.5	-3.3	-2.8
	6H	-4.5	-4.3	-4.1	-3.9	-3.4	-3.9	-3.7	-3.4	-3.3	-2.8
	8H	-4.5	-4.3	-4.0	-3.8	-3.3	-3.9	-3.8	-3.4	-3.3	-2.7
Variations with the observer position at spacing:											
S =		1.0H	4.0 / -2.7				3.9 / -2.3				
		1.5H	6.5 / -3.7				6.3 / -3.3				
		2.0H	8.4 / -4.4				8.2 / -3.9				