


Last information update: May 2024

Product configuration: M544+L052

M544: frame 35W HIT

**Product code**M544: frame 35W HIT **Attention! Code no longer in production****Technical description**

Recessed round wall-washer luminaire designed to use a metal halide lamp 35W HIT G8.5. Version with die-cast aluminium rim for surface-mounting. Professional optic for use with a discharge lamp. Die-cast aluminium body. Optical structure consists of high strength thermoplastic circular frame, sandblasted aluminium inner screen, main reflector with visible rim and integrated sector for wall-washer effect made of shiny polished aluminium.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 30 mm.

Colour

White / Aluminium (39)

Mounting

ceiling recessed


Wiring

Product complete with electronic components

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	1422.3	CRI:	81
W system:	39	Colour temperature [K]:	3000
Im source:	3300	Voltage [Vin]:	230
W source:	35	Lamp code:	L052
Luminous efficiency (Im/W, real value):	36.5	Socket:	G8,5
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	HIT-TC-CE
Light Output Ratio (L.O.R.) [%]:	43	Number of optical assemblies:	1

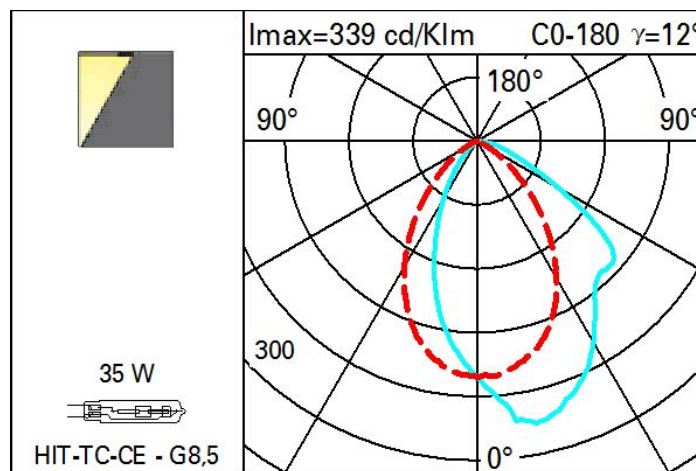Polar

Illuminances

