



**iGuzzini**

**Product configuration: P518**

P518: Fixed circular recessed luminaire - Ø 125 mm - warm white - white optic - DALI



## Product code

P518: Fixed circular recessed luminaire - Ø 125 mm - warm white - white optic - DALI

### Technical description

**Technical description:**  
Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector painted white with a layer of anti-scratch protection. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in warm white colour tone CRI90 (3000K). General lighting beam.

## Installation

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 20 mm.

**Colour**  
White (01)

**Weight (Kg)**  
1.02

## Mounting

ceiling recessed

## Wiring

product complete with DALI components


Complies with EN60598-1 and pertinent regulations



## Technical data

Im system:	2624	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W system:	32	Lamp code:	LED
Im source:	3500	Number of lamps for optical assembly:	1
W source:	29	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	82	Number of optical assemblies:	1
Im in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Inrush current:	18 A / 250 µs
Light Output Ratio (L.O.R.) [%]:	75	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 21 luminaires B16A: 34 luminaires C10A: 35 luminaires C16A: 57 luminaires
Beam angle [°]:	78°	Minimum dimming %:	1
CRI (minimum):	90	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	3000	Control:	DALI-2
MacAdam Step:	2		

## Polar

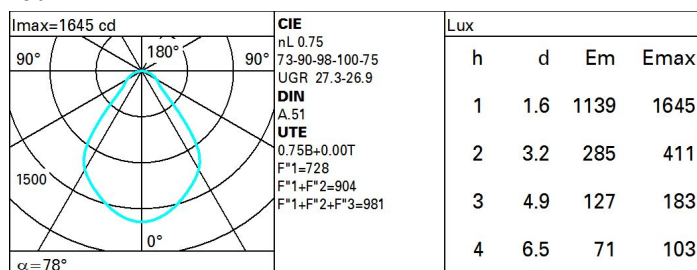



# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	58	52	48	45	52	48	47	44	58
1.0	62	57	53	50	56	52	52	48	64
1.5	68	64	61	58	63	60	59	55	74
2.0	72	68	66	63	67	65	64	60	81
2.5	74	71	69	67	70	68	67	64	85
3.0	75	73	71	69	71	70	69	66	88
4.0	77	75	74	72	73	72	71	68	91
5.0	78	76	75	74	75	74	72	70	93

# UGR diagram

Corrected UGR values (at 3500 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	24.6	25.6	24.9	25.8	26.1	24.6	25.6	24.9	25.8	26.1
	3H	25.6	26.5	25.9	26.7	27.0	24.9	25.7	25.2	26.0	26.3
	4H	26.0	26.8	26.4	27.1	27.4	25.0	25.8	25.3	26.1	26.4
	6H	26.3	27.1	26.7	27.4	27.7	25.0	25.7	25.4	26.1	26.4
	8H	26.4	27.2	26.8	27.5	27.8	25.0	25.7	25.4	26.0	26.4
	12H	26.5	27.2	26.9	27.5	27.9	25.0	25.6	25.4	26.0	26.4
4H	2H	25.0	25.8	25.3	26.1	26.4	26.0	26.8	26.4	27.1	27.4
	3H	26.2	26.9	26.6	27.2	27.6	26.5	27.2	26.9	27.5	27.9
	4H	26.7	27.3	27.2	27.7	28.1	26.7	27.3	27.2	27.7	28.1
	6H	27.2	27.7	27.6	28.1	28.5	26.9	27.4	27.3	27.8	28.3
	8H	27.3	27.8	27.8	28.2	28.7	26.9	27.4	27.4	27.8	28.3
	12H	27.4	27.8	27.9	28.3	28.7	26.9	27.4	27.4	27.8	28.3
8H	4H	26.9	27.4	27.4	27.8	28.3	27.3	27.8	27.8	28.2	28.7
	6H	27.5	27.9	28.0	28.4	28.8	27.6	28.0	28.1	28.4	28.9
	8H	27.7	28.0	28.2	28.5	29.0	27.7	28.0	28.2	28.5	29.0
	12H	27.8	28.1	28.3	28.6	29.1	27.8	28.1	28.3	28.5	29.1
12H	4H	26.9	27.4	27.4	27.8	28.3	27.4	27.8	27.9	28.3	28.7
	6H	27.5	27.9	28.0	28.3	28.9	27.7	28.0	28.2	28.5	29.0
	8H	27.8	28.1	28.3	28.5	29.1	27.8	28.1	28.3	28.6	29.1
Variations with the observer position at spacing:											
S =		0.7 / -0.5					0.7 / -0.5				
		1.3 / -0.8					1.3 / -0.8				
		2.3 / -1.0					2.3 / -1.0				