
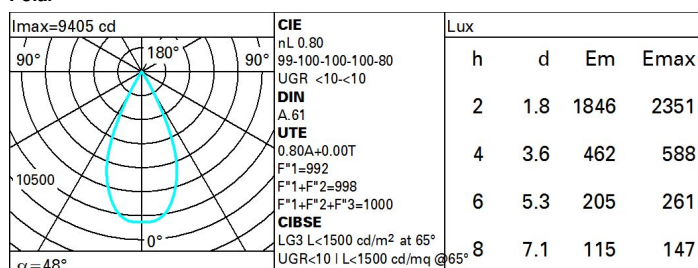


P531: Empotrable circular fijo - Ø 212 mm - neutral white - óptica wide flood - UGR<10



Coefficientes de uso

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	68	66	64	68	65	65	62	78
1.0	75	72	69	68	71	69	68	66	82
1.5	79	76	74	73	75	74	73	71	88
2.0	81	80	78	77	78	77	76	74	93
2.5	83	81	80	79	80	79	78	76	96
3.0	84	83	82	81	82	81	80	78	98
4.0	85	84	84	83	83	82	81	79	99
5.0	85	85	84	84	84	83	82	80	100

Curva límite de luminancia

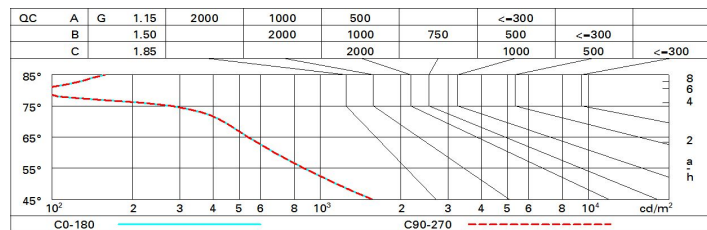


Diagrama UGR

Corrected UGR values (at 6300 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70 0.50 0.20	0.70 0.30 0.20	0.50 0.50 0.20	0.50 0.30 0.20	0.30 0.30 0.20	0.70 0.50 0.20	0.70 0.30 0.20	0.50 0.50 0.20	0.50 0.30 0.20	0.30 0.30 0.20
viewed crosswise						viewed endwise					
2H	2H	4.6	5.2	4.9	5.4	5.7	4.6	5.2	4.9	5.4	5.7
	3H	4.6	5.1	4.9	5.4	5.6	4.5	5.0	4.8	5.3	5.6
	4H	4.5	5.0	4.8	5.3	5.6	4.5	5.0	4.8	5.2	5.5
	6H	4.4	4.9	4.8	5.2	5.5	4.4	4.8	4.7	5.2	5.5
	8H	4.4	4.9	4.8	5.2	5.5	4.4	4.8	4.7	5.1	5.5
	12H	4.4	4.8	4.7	5.1	5.5	4.3	4.7	4.7	5.1	5.4
4H	2H	4.5	5.0	4.8	5.2	5.5	4.5	5.0	4.8	5.3	5.6
	3H	4.5	4.9	4.8	5.2	5.6	4.5	4.9	4.8	5.2	5.6
	4H	4.4	4.8	4.8	5.1	5.5	4.4	4.8	4.8	5.1	5.5
	6H	4.3	4.7	4.7	5.0	5.5	4.3	4.7	4.8	5.1	5.5
	8H	4.3	4.6	4.7	5.0	5.4	4.3	4.6	4.7	5.0	5.4
	12H	4.2	4.5	4.7	4.9	5.4	4.2	4.5	4.7	4.9	5.4
8H	4H	4.3	4.6	4.7	5.0	5.4	4.3	4.6	4.7	5.0	5.4
	6H	4.2	4.5	4.7	4.9	5.4	4.2	4.5	4.7	4.9	5.4
	8H	4.2	4.4	4.6	4.8	5.3	4.2	4.4	4.6	4.8	5.3
	12H	4.1	4.3	4.6	4.8	5.3	4.1	4.3	4.6	4.8	5.3
12H	4H	4.2	4.5	4.7	4.9	5.4	4.2	4.5	4.7	4.9	5.4
	6H	4.2	4.4	4.6	4.8	5.3	4.2	4.4	4.6	4.8	5.3
	8H	4.1	4.3	4.6	4.8	5.3	4.1	4.3	4.6	4.8	5.3
Variations with the observer position at spacing:											
S =	1.0H	5.8 / -5.9					5.8 / -5.9				
	1.5H	8.5 / -7.1					8.5 / -7.1				
	2.0H	10.5 / -8.0					10.5 / -8.0				