iGuzzini

Last information update: March 2025

### Product configuration: 198B.04

198B.04: 48V round spotlight - Ø 126 small body - Flood beam - BLE Casambi - 19.1W 2127.8lm - 4000K - Black




### Product code

198B.04: 48V round spotlight - Ø 126 small body - Flood beam - BLE Casambi - 19.1W 2127.8lm - 4000K - Black

#### Technical description

Adjustable spotlight with adapter for installation on 48V low voltage track. Luminaire made of die-cast aluminium with a front part in a thermoplastic material. The adapter made of a thermoplastic material includes the DC/DC driver circuit and Bluetooth protocol. Integrated «Bluetooth Casambi» technology allows each light module inserted on the track to be adjusted independently. Bluetooth Low Energy (Casambi) technology. Frequency 2.4 GHz BLE. The luminaire can be controlled with the Casambi App that enables onoff, dimming and scene recall functions. The app is available on the Apple Store and Google Play Store. It can be integrated in the system's "Mesh" network that allows multiple luminaires to be controlled. OTA (over the air) update via app. Integrated Beacon that can be activated via Smart Light Control (iBeacon) that enables functions including push notification and indoor navigation-wayfinding. The double adjustability of the spotlight allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. A rapid tool-free system for connecting the adapter electrically and mechanically to the track. Optical assembly with OPTIBEAM LENS technology - flood beam. Technical accessories are also available to optimise light emission. A complete range of OPTI BEAM REFRACTORS (optional) also allows the current light beam opening to be varied in the event of eventual changes in lighting requirements.



#### Installation

An adapter is used to fix the device mechanically and tool-free to the 48V track. Max luminaire-luminaire distance (\*): 8 m; max smartphone-luminaire distance (\*): 20 m.

Colour	Weight (Kg)
Black (04)	1.02

# Mounting

Low voltage track

# Wiring

Direct connection on 48V track. Track power supply unit to be ordered separately. Luminaire that can be controlled with Bluetooth technology (Casambi).

#### Notes

(\*) The maximum distance for Bluetooth installations is affected by physical obstacles, like walls, metal panels and the layout of the system. We suggest that a test is conducted at the installation site. Technical and anti-glare accessories available; with option of the combined installation of two internal accessories.

When combined with accessory item code. MZ16 (asymmetrical visor) visual comfort is increased by simultaneously reducing the dispersion of stray light (see the instruction sheet).

Complies with EN60598-1 and pertinent regulations




IP20







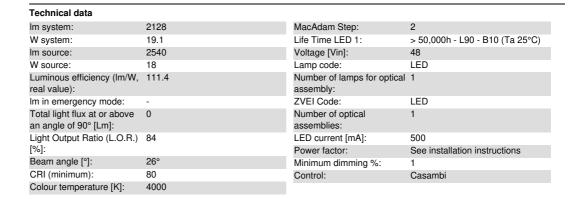

# Polar

lmax=8393 cd	Lux			
90°   180°   90°	h	d	Em	Emax
	8	3.8	106	131
	16	7.7	26	33
9000	24	11.5	12	15
α=27°	32	15.3	7	8



