Product code

iGuzzini

accessories rotate 360° about the spotlight longitudinal axis.

Last information update: June 2023

Product configuration: P278


P278: Medium body spotlight - Warm white - DALI ballast - flood optic

P278: Medium body spotlight - Warm white - DALI ballast - flood optic Attention! Code no longer in production

Adjustable spotlight with adapter for installation on DALI mains electrified track for high output LED lamp with monochrome emission

component can also be applied, selected from an asymmetrical screen, an anti-glare screen and directional flaps. All external





Installation

Technical description


On a DALI electrified track

Colour

Mounting

Wiring

White (01) | Black (04) | Grey (15)



three circuit track

DALI components housed in the luminaire.



Technical data Im system: 1894.6 Colour temperature [K]: W system: 43 MacAdam Step: Im source: 2600 Life Time LED 1: W source: 38 Ballast losses [W]: Luminous efficiency (Im/W, 44.1 Lamp code: real value): Number of lamps for op

0

28°

90

Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
Ballast losses [W]:	5
Lamp code:	LED
Number of lamps for optical	1
assembly:	
ZVEI Code:	LED
Number of optical	1
assemblies:	
Control:	DALI

3000

3

Complies with EN60598-1 and pertinent regulations


Polar

[%]: Beam angle [°]:

CRI:

Im in emergency mode: Total light flux at or above

an angle of 90° [Lm]: Light Output Ratio (L.O.R.) 73

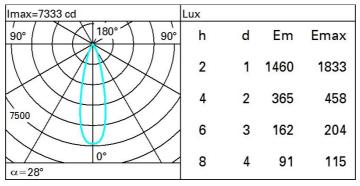

P278_EN 1 / 1