

## Pixel Pro


Design Iosa Ghini

iGuzzini

Last information update: May 2024

### Product configuration: MP15

MP15: recessed luminaire Ø 205 - warm white passive dissipation LED - integrated DALI control gear - wide flood



### Product code

MP15: recessed luminaire Ø 205 - warm white passive dissipation LED - integrated DALI control gear - wide flood **Attention! Code no longer in production**

### Technical description

recessed adjustable removable luminaire for LED lamp with passive heat dissipation system. Structure with die-cast aluminium frame and main body; shaped surface with high level radiant effect for effectively reducing the temperature and keeping the long-term LED lamp performance unchanged. Steel rotation hinge, chrome-plated aluminium body closing ring. Reflector with high efficiency super-pure aluminium optic - wide flood beam angle. Body adjusted using manually operated device: internal 30° - external 75° - rotation about axis 355°. Supplied with DALI dimmable control gear connected to the luminaire. Warm white high colour rendering index LED CRI (Ra) > 90.

### Installation

recessed using steel springs in false ceilings with thicknesses starting at 1 mm; preparation hole Ø 195

### Colour

White / Aluminium (39) | Grey/Aluminium (78)

### Weight (Kg)

2.22

### Mounting

ceiling recessed

### Wiring

on control gear box with quick-coupling connections

Complies with EN60598-1 and pertinent regulations



### Technical data

Im system:	3948	CRI:	90
W system:	48.6	Colour temperature [K]:	3000
Im source:	5000	MacAdam Step:	2
W source:	39	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	81.2	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	48°	Control:	DALI


### Polar

 Imax=6548 cd 90° 180° 90° 6000 0° α=48°	<b>CIE</b> nL 0.79 99-100-100-100-79 UGR 15.7-15.7 <b>DIN</b> A.61 <b>UTE</b> 0.79A+0.00T F*1=988 F*1+F*2=997 F*1+F*2+F*3=1000 <b>CIBSE</b> LG3 L<1500 cd/m² at 65° UGR<16   L<1500 cd/mq @65°				<b>Lux</b>			
	h	d	Em	Emax				
	2	1.8	1282	1636				
	4	3.6	320	409				
	6	5.3	142	182				
	8	7.1	80	102				

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	67	65	63	67	64	64	61	78
1.0	74	71	68	67	70	68	67	65	82
1.5	78	75	73	72	74	73	72	70	88
2.0	80	78	77	76	77	76	75	73	93
2.5	82	80	79	78	79	78	77	75	95
3.0	83	82	81	80	81	80	79	77	97
4.0	84	83	83	82	82	81	80	78	99
5.0	84	84	83	83	83	82	81	79	100

# Luminance curve limit

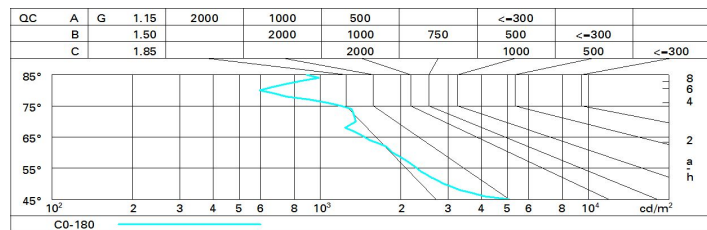

# UGR diagram

Corrected UGR values (at 5000 lm bare lamp luminous flux)											
Reflect.: ceil/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	16.2	16.8	16.5	17.0	17.3	16.2	16.8	16.5	17.0	17.3
	3H	16.1	16.6	16.4	16.9	17.2	16.1	16.6	16.4	16.9	17.2
	4H	16.1	16.5	16.4	16.8	17.1	16.0	16.5	16.4	16.8	17.1
	6H	16.0	16.4	16.3	16.7	17.0	16.0	16.4	16.3	16.7	17.0
	8H	15.9	16.4	16.3	16.7	17.0	15.9	16.3	16.3	16.7	17.0
	12H	15.9	16.3	16.3	16.6	17.0	15.9	16.3	16.3	16.6	17.0
4H	2H	16.0	16.5	16.4	16.8	17.1	16.1	16.5	16.4	16.8	17.1
	3H	15.9	16.3	16.3	16.6	17.0	15.9	16.3	16.3	16.7	17.0
	4H	15.8	16.2	16.2	16.5	16.9	15.8	16.2	16.2	16.5	16.9
	6H	15.8	16.1	16.2	16.5	16.9	15.7	16.1	16.2	16.5	16.9
	8H	15.7	16.0	16.1	16.4	16.8	15.7	16.0	16.1	16.4	16.8
	12H	15.7	15.9	16.1	16.3	16.8	15.7	15.9	16.1	16.3	16.8
8H	4H	15.7	16.0	16.1	16.4	16.8	15.7	16.0	16.1	16.4	16.8
	6H	15.6	15.8	16.1	16.3	16.8	15.6	15.9	16.1	16.3	16.8
	8H	15.6	15.8	16.0	16.2	16.7	15.6	15.8	16.0	16.2	16.7
	12H	15.5	15.7	16.0	16.2	16.7	15.5	15.7	16.0	16.2	16.7
12H	4H	15.7	15.9	16.1	16.3	16.8	15.7	15.9	16.1	16.3	16.8
	6H	15.6	15.8	16.0	16.2	16.7	15.6	15.8	16.1	16.2	16.7
	8H	15.5	15.7	16.0	16.2	16.7	15.5	15.7	16.0	16.2	16.7
Variations with the observer position at spacing:											
S =	1.0H	6.1 / -12.0					6.1 / -12.0				
	1.5H	8.9 / -12.7					8.9 / -12.7				
	2.0H	10.9 / -13.5					10.9 / -13.5				