


Last information update: May 2024

**Product configuration: MR03**

MR03: Medium body spotlight - Neutral white - electronic ballast and dimmer - wide flood optic



**Product code**

MR03: Medium body spotlight - Neutral white - electronic ballast and dimmer - wide flood optic **Attention! Code no longer in production**

**Technical description**

Spotlight made of die-cast aluminium and thermoplastic material. The luminaire can be rotated by 340° about the vertical axis and tilted by +/- 100° in relation to the horizontal plane. Hi-precision beam aiming is guaranteed by screw-operated mechanical locks, graduated scales and friction controls. The spotlight is equipped with a die-cast aluminium ballast unit for wall or ceiling mounting. Luminaire for high output LED lamp with monochrome emission in a neutral white colour tone (4000K) . Dimmable electronic ballast. Equipped with an accessory holding ring designed to contain a flat accessory. Another external component can also be applied, selected from directional flaps and an asymmetric screen. All external accessories rotate 360° about the spotlight longitudinal axis.

**Installation**

Wall or ceiling-mounted.

**Colour**

White (01) | Grey (15)

**Weight (Kg)**

0.9

**Mounting**

wall arm|wall surface|ceiling surface

**Wiring**

The dimmable electronic components are housed in the luminaire.


Complies with EN60598-1 and pertinent regulations



**Technical data**

Im system:	2479	CRI (minimum):	80
W system:	23.9	Colour temperature [K]:	4000
Im source:	3400	MacAdam Step:	2
W source:	20	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	103.7	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	73	Number of optical assemblies:	1
Beam angle [°]:	48°	Control:	Completo di dimmer


**Polar**

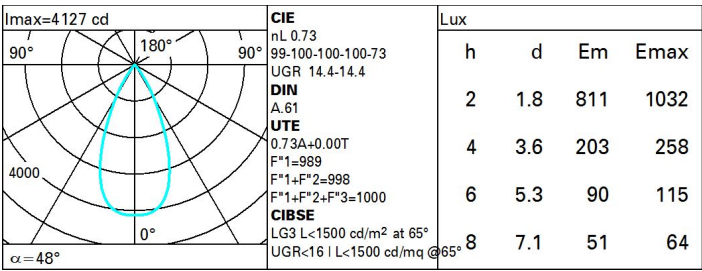

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	66	62	60	58	62	59	59	57	78
1.0	68	65	63	61	65	63	62	60	82
1.5	72	70	68	66	69	67	66	64	88
2.0	74	73	71	70	71	70	70	68	93
2.5	76	74	73	72	73	72	72	70	95
3.0	77	76	75	74	74	74	73	71	97
4.0	77	77	76	76	76	75	74	72	99
5.0	78	77	77	77	76	76	75	73	100

# Luminance curve limit

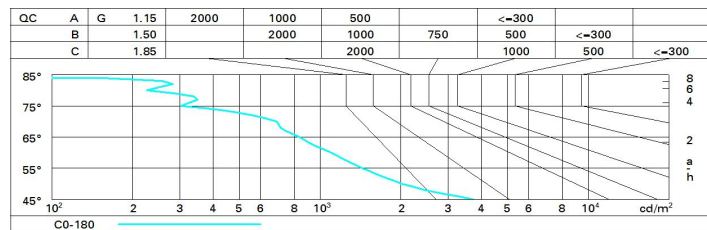

# UGR diagram

Corrected UGR values (at 3400 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	15.0	15.5	15.2	15.7	16.0	15.0	15.5	15.2	15.7	16.0
	3H	14.8	15.3	15.1	15.6	15.9	14.8	15.3	15.1	15.6	15.9
	4H	14.8	15.2	15.1	15.5	15.8	14.8	15.2	15.1	15.5	15.8
	6H	14.7	15.1	15.0	15.4	15.8	14.7	15.1	15.0	15.4	15.7
	8H	14.7	15.1	15.0	15.4	15.7	14.6	15.1	15.0	15.4	15.7
	12H	14.6	15.0	15.0	15.3	15.7	14.6	15.0	15.0	15.3	15.7
4H	2H	14.8	15.2	15.1	15.5	15.8	14.8	15.2	15.1	15.5	15.8
	3H	14.6	15.0	15.0	15.4	15.7	14.6	15.0	15.0	15.4	15.7
	4H	14.5	14.9	14.9	15.2	15.6	14.5	14.9	14.9	15.2	15.6
	6H	14.4	14.8	14.9	15.1	15.6	14.4	14.8	14.9	15.1	15.6
	8H	14.4	14.7	14.8	15.1	15.5	14.4	14.7	14.8	15.1	15.5
	12H	14.3	14.6	14.8	15.0	15.5	14.3	14.6	14.8	15.0	15.5
8H	4H	14.4	14.7	14.8	15.1	15.5	14.4	14.7	14.8	15.1	15.5
	6H	14.3	14.5	14.8	15.0	15.5	14.3	14.5	14.8	15.0	15.5
	8H	14.3	14.5	14.7	14.9	15.4	14.3	14.5	14.7	14.9	15.4
	12H	14.2	14.4	14.7	14.9	15.4	14.2	14.4	14.7	14.9	15.4
12H	4H	14.3	14.6	14.8	15.0	15.5	14.3	14.6	14.8	15.0	15.5
	6H	14.3	14.4	14.7	14.9	15.4	14.3	14.4	14.7	14.9	15.4
	8H	14.2	14.4	14.7	14.9	15.4	14.2	14.4	14.7	14.9	15.4
Variations with the observer position at spacing:											
S =	1.0H	6.1 / -14.2					6.1 / -14.2				
	1.5H	8.9 / -15.7					8.9 / -15.7				
	2.0H	10.9 / -16.4					10.9 / -16.4				