


Last information update: May 2024

**Product configuration: P681**

P681: spotlight - neutral white - wide flood optic

**Product code**P681: spotlight - neutral white - wide flood optic **Attention! Code no longer in production****Technical description**

Adjustable spotlight with adapter for installation on mains voltage track for LED source with CoB technology, Neutral White (4000K) emission. Electronic control gear housed inside the track-mounted power supply box. The luminaire is made of die-cast aluminium and thermoplastic. OPTI BEAM superpure aluminium reflector with high luminous efficacy and uniform distribution, wide flood optic. Features 90° inclination on the horizontal plane and 360° rotation around the vertical axis, with mechanical locking device for aiming. Passive cooling system. Possibility of installing a refractor, to be ordered separately, for elliptical light beam distribution.

**Installation**

The luminaire can be installed on a standard electrified track or on an appropriate channel incorporating an electrified track.

**Colour**

White (01) | Black (04)

**Weight (Kg)**

1.82

**Mounting**

three circuit track|ceiling surface

**Wiring**

product inclusive of electronic components incorporated into the track-mounted box.

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	3796	CRI:	80
W system:	35.6	Colour temperature [K]:	4000
lm source:	5000	MacAdam Step:	2
W source:	32	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	106.6	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	76	Number of optical assemblies:	1
Beam angle [°]:	48°		

**Polar**


Imax=6194 cd		CIE		Lux			
90°	180°	90°	0°	h	d	Em	E <sub>max</sub>
6000 $\alpha = 48^\circ$ CIE nL 0.76 99-100-100-100-76 UGR 16.7-16.7 DIN A.61 UTE 0.76A+0.00T F*1=991 F*1+F*2=999 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m <sup>2</sup> at 65° UGR<19   L<1500 cd/mq @65°				2	1.8	1235	1546
				4	3.6	309	387
				6	5.3	137	172
				8	7.1	77	97



# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	68	65	62	60	64	62	61	59	78
1.0	71	68	66	64	67	65	65	63	82
1.5	75	73	71	69	72	70	69	67	88
2.0	77	76	74	73	74	73	72	70	93
2.5	79	77	76	75	76	75	75	73	95
3.0	80	79	78	77	78	77	76	74	98
4.0	81	80	79	79	79	78	77	75	99
5.0	81	81	80	80	79	79	78	76	100

# Luminance curve limit

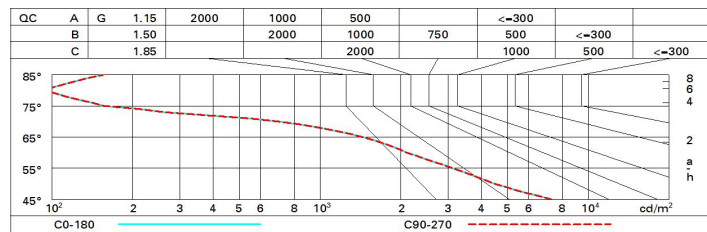

# UGR diagram

Corrected UGR values (at 5000 lm bare lamp luminous flux)											
Reflect.: ceil/cav walls work pl. Room dim x      y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	17.3	17.9	17.6	18.1	18.3	17.3	17.9	17.6	18.1	18.3
	3H	17.2	17.7	17.5	18.0	18.2	17.2	17.7	17.5	18.0	18.2
	4H	17.1	17.6	17.4	17.9	18.2	17.1	17.6	17.5	17.9	18.2
	6H	17.0	17.5	17.4	17.8	18.1	17.0	17.5	17.4	17.8	18.1
	8H	17.0	17.4	17.4	17.7	18.1	17.0	17.4	17.4	17.7	18.1
	12H	17.0	17.4	17.3	17.7	18.0	17.0	17.4	17.3	17.7	18.0
4H	2H	17.1	17.6	17.5	17.9	18.2	17.1	17.6	17.4	17.9	18.2
	3H	17.0	17.4	17.3	17.7	18.1	17.0	17.4	17.3	17.7	18.1
	4H	16.9	17.2	17.3	17.6	18.0	16.9	17.2	17.3	17.6	18.0
	6H	16.8	17.1	17.2	17.5	17.9	16.8	17.1	17.2	17.5	17.9
	8H	16.7	17.0	17.2	17.4	17.9	16.7	17.0	17.2	17.4	17.9
	12H	16.7	16.9	17.2	17.4	17.8	16.7	16.9	17.2	17.4	17.8
8H	4H	16.7	17.0	17.2	17.4	17.9	16.7	17.0	17.2	17.4	17.9
	6H	16.7	16.9	17.1	17.3	17.8	16.7	16.9	17.1	17.3	17.8
	8H	16.6	16.8	17.1	17.3	17.8	16.6	16.8	17.1	17.3	17.8
	12H	16.5	16.7	17.0	17.2	17.7	16.5	16.7	17.0	17.2	17.7
12H	4H	16.7	16.9	17.2	17.4	17.8	16.7	16.9	17.2	17.4	17.8
	6H	16.6	16.8	17.1	17.3	17.8	16.6	16.8	17.1	17.3	17.8
	8H	16.5	16.7	17.0	17.2	17.7	16.5	16.7	17.0	17.2	17.7
Variations with the observer position at spacing:											
S =	1.0H	6.4 / -15.1					6.4 / -15.1				
	1.5H	9.2 / -17.5					9.2 / -17.5				
	2.0H	11.2 / -20.3					11.2 / -20.3				