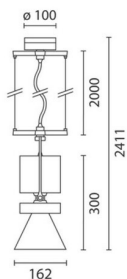
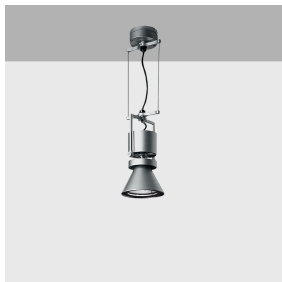


Last information update: April 2024

**Product configuration: MP87**

MP87: Large body spotlight - warm white - electronic ballast - wide flood optic

**Product code**MP87: Large body spotlight - warm white - electronic ballast - wide flood optic **Attention! Code no longer in production****Technical description**

Pendant luminaire equipped with a ballast unit made of die-cast aluminium and thermoplastic material. The pendant system consists of steel cables L=2000 that provide a simple mechanical anchoring system. Having been rotated and tilted, the luminaire can be locked mechanically in position to ensure efficient light aiming (even during maintenance operations). Luminaire for high output LED lamp with monochrome emission in a warm white colour tone (3000K) . Electronic ballast. Equipped with an accessory holding ring designed to contain a flat accessory. Another external component can also be applied, selected from directional flaps and an asymmetric screen. All external accessories rotate 360° about the spotlight longitudinal axis.

**Installation**

Ceiling-mounted using the ballast unit included.

**Colour**

Grey (15)


**Mounting**

ceiling pendant

**Wiring**

Electronic components housed in the luminaire.

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	3384	CRI (minimum):	90
W system:	37.5	Colour temperature [K]:	3000
lm source:	4400	MacAdam Step:	2
W source:	33	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	90.2	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	77	Number of optical assemblies:	1
Beam angle [°]:	44°		


**Polar**

		<b>CIE</b> nL 0.77 99-100-100-100-77 UGR <10-10 <b>DIN</b> A.61 <b>UTE</b> 0.77A+0.00T F*1=988 F*1+F*2=999 F*1+F*2+F*3=1000 <b>CIBSE</b> LG3 L<1500 cd/m² at 65° UGR<10   L<1500 cd/mq @ 65°		<b>Lux</b>			
h	d	Em	Emax				
2	1.6	1370	1683				
4	3.2	342	421				
6	4.8	152	187				
8	6.5	86	105				

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	69	65	63	61	65	63	62	60	78
1.0	72	69	67	65	68	66	66	63	82
1.5	76	73	71	70	72	71	70	68	88
2.0	78	76	75	74	75	74	73	71	93
2.5	80	78	77	76	77	76	75	73	95
3.0	81	80	79	78	78	78	77	75	97
4.0	82	81	80	80	80	79	78	76	99
5.0	82	82	81	81	80	80	79	77	100

# Luminance curve limit

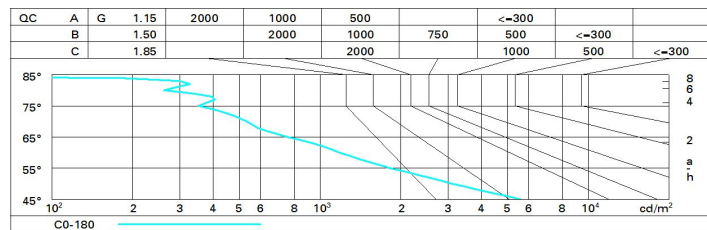

# UGR diagram

Corrected UGR values (at 4400 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x          y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	9.9	10.5	10.2	10.7	10.9	9.9	10.5	10.2	10.7	10.9
	3H	9.8	10.3	10.1	10.6	10.8	9.8	10.3	10.1	10.6	10.8
	4H	9.7	10.2	10.0	10.5	10.8	9.7	10.2	10.0	10.5	10.8
	6H	9.6	10.1	10.0	10.4	10.7	9.6	10.1	10.0	10.4	10.7
	8H	9.6	10.0	10.0	10.4	10.7	9.6	10.0	9.9	10.3	10.7
	12H	9.6	10.0	9.9	10.3	10.7	9.6	10.0	9.9	10.3	10.7
4H	2H	9.7	10.2	10.0	10.5	10.8	9.7	10.2	10.0	10.5	10.8
	3H	9.6	10.0	9.9	10.3	10.7	9.6	10.0	10.0	10.3	10.7
	4H	9.5	9.9	9.9	10.2	10.6	9.5	9.9	9.9	10.2	10.6
	6H	9.4	9.7	9.8	10.1	10.6	9.4	9.7	9.8	10.1	10.5
	8H	9.4	9.7	9.8	10.1	10.5	9.4	9.7	9.8	10.1	10.5
	12H	9.3	9.6	9.8	10.0	10.5	9.3	9.6	9.8	10.0	10.5
8H	4H	9.4	9.7	9.8	10.1	10.5	9.4	9.7	9.8	10.1	10.5
	6H	9.3	9.5	9.8	10.0	10.4	9.3	9.5	9.8	10.0	10.4
	8H	9.2	9.4	9.7	9.9	10.4	9.2	9.4	9.7	9.9	10.4
	12H	9.2	9.4	9.7	9.8	10.4	9.2	9.4	9.7	9.8	10.4
12H	4H	9.3	9.6	9.8	10.0	10.5	9.3	9.6	9.8	10.0	10.5
	6H	9.2	9.4	9.7	9.9	10.4	9.2	9.4	9.7	9.9	10.4
	8H	9.2	9.4	9.7	9.8	10.4	9.2	9.4	9.7	9.8	10.4
Variations with the observer position at spacing:											
S =	1.0H	5.4 / -8.9					5.4 / -8.9				
	1.5H	8.1 / -11.2					8.1 / -11.2				
	2.0H	10.1 / -12.7					10.1 / -12.7				