



Last information update: April 2025

**Product configuration: QG39**

QG39: Ø 225 mm - neutral white - DALI



**Product code**

QG39: Ø 225 mm - neutral white - DALI

**Technical description**

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in neutral white colour tone (4000K). Wall-washer light emission.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 20 mm.

**Colour**

White / Aluminium (39)

**Weight (Kg)**

1.03

**Mounting**

ceiling surface

**Wiring**

product complete with DALI components


Complies with EN60598-1 and pertinent regulations



**Technical data**

lm system:	4399	Colour temperature [K]:	4000
W system:	36.7	MacAdam Step:	2
lm source:	5300	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	32	Lamp code:	LED
Luminous efficiency (lm/W, real value):	119.9	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	83	Control:	DALI-2
CRI (minimum):	80		

Polar

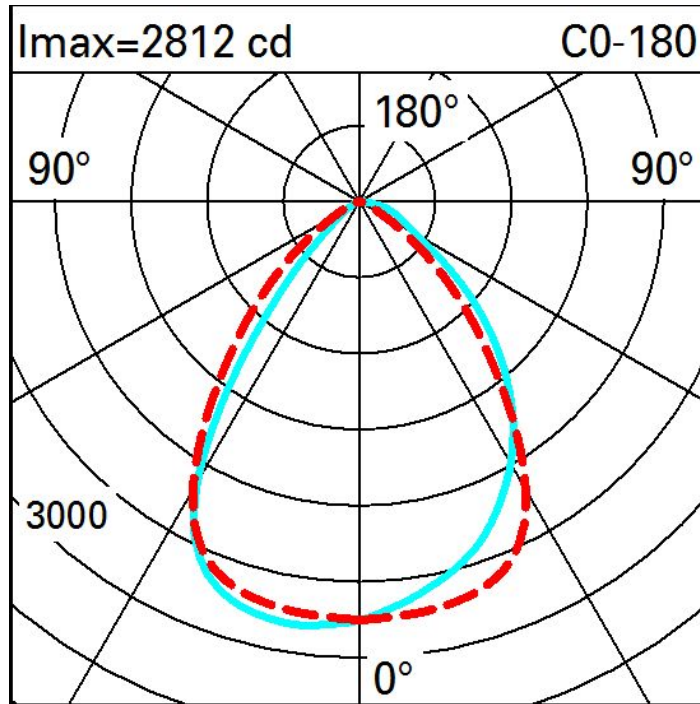

Illuminances

Lux		Wall distance = 1m											
3													
	2	4	13	41	142	235	142	41	13	4	2		
	2	3	9	27	100	281	422	281	100	27	9	3	
	1	7	19	58	143	258	323	258	143	58	19	7	
	1	14	31	65	119	175	201	175	119	65	31	14	
	0	18	35	59	87	112	124	112	87	59	35	18	
		m	-2	-1	0	1	2	3					