
Last information update: November 2024

## **Product configuration: BX24**

BX24: Spotlight with bracket - Neutral White COB Led - integrated dimm. ballast DALI- Wide Flood Optic





## Product code

BX24: Spotlight with bracket - Neutral White COB Led - integrated dimm. ballast DALI- Wide Flood Optic Attention! Code no longer in production

#### Technical description

Floodlight designed to use Neutral White COB LED lamps with a wide flood optic. Can be installed at ground level, on walls (using screw anchors) and on pole mounting systems. The luminaire consists of an optical assembly/component-holding box and hidden fixing bracket. The optical assembly and front frame are made of die-cast aluminium alloy painted with a smooth finish (grey RAL 9007) or a textured finish (white RAL 9016). The painting process includes a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The next painting stage consists of a primer and a liquid acrylic paint, cured at 150°, with a high level of weather and UV ray resistance. The tempered sodium-calcium glass cover has customised serigraphy, is 4mm thick, and joined to the frame with silicone. The frame is fastened to the optical assembly by two M5 AlSI 304 stainless steel captive screws and a galvanised steel safety cable. The product comes complete with a neutral white colour, monochrome COB LED circuit, an optic with a 99.93% super-pure aluminium OPTIBEAM reflector with a polished, anodized surface and built-in electronic ballast. The component-holding box, in the rear of the luminaire, is set up to hold the control gear, which is fixed with captive screws on a galvanised steel pull-out plate. The control gear can be accessed through the rear door made of painted aluminium alloy, fixed to the product body with four M5 AlSI 304 stainless steel captive screws and a safety cable. iPro can be adjusted +95°/-5° relative to the horizontal line using a bracket made of extruded aluminium, on which a graduated scale (with 15° steps) is marked using serigraphy. The internal silicone seals guarantee watertightness IP66h Set up for pass-through wiring using a double M24x1.5 nickel-plated brass cable gland (suitable for cables with 7±16rm diameter). All external screws used are made of A2 stainless steel. The luminaire technical chara

#### Installation

Ground, wall or ceiling installation using special bracket. Secure using screw anchors for concrete, cement and solid brick. It can also be installed on a MultiPro pole system using suitable accessories.

Colour	Weight (Kg)
White (01)   Grey (15)	6

#### Mounting

wall arm|pole arm|ground surface|wall surface|ground anchored|ground spike|ceiling surface|u-bracket

#### Wiring

Control gear complete with DALI dimmable electronic ballast (220÷240V ac 50/60Hz) and quick-coupling terminals.

## Notes

Dimming function with pushbutton (DIM PUSH): for this option consult the instructions included in the package.

Complies with EN60598-1 and pertinent regulations

IK07 IP66


IK07 IP66

W system:       41.6       MacAdam Step:       2         Im source:       5500       Life Time LED 1:       100,000h - L80 - B10 (Ta 25°C         W source:       35       Life Time LED 2:       100,000h - L80 - B10 (Ta 40°C         Luminous efficiency (Im/W, real value):       105.7       Lamp code:       LED         Number of lamps for optical       1         Im in emergency mode:       -       assembly:         Total light flux at or above an angle of 90° [Lm]:       Vericode:       LED         Number of optical       1         Light Output Ratio (L.O.R.)       80         [%]:       Intervallo temperatura       from -20°C to +35°C.         Beam angle [°]:       48°	Technical data			
Im source:       5500       Life Time LED 1:       100,000h - L80 - B10 (Ta 25°C         W source:       35       Life Time LED 2:       100,000h - L80 - B10 (Ta 40°C         Luminous efficiency (Im/W, real value):       105.7       Lamp code:       LED         Number of lamps for optical       1       assembly:         Total light flux at or above an angle of 90° [Lm]:       Value Code:       LED         Number of optical       1         Light Output Ratio (L.O.R.)       80         Intervallo temperatura       from -20°C to +35°C.         Beam angle [°]:       48°	Im system:	4395	Colour temperature [K]:	4000
W source: 35  Life Time LED 2: 100,000h - L80 - B10 (Ta 40°C Luminous efficiency (Im/W, 105.7 real value):  Im in emergency mode: - sessembly:  Total light flux at or above an angle of 90° [Lm]:  Light Output Ratio (L.O.R.) 80  Beam angle [°]: 48°  Life Time LED 2: 100,000h - L80 - B10 (Ta 40°C LED Number of plamps for optical 1 assembly:  LED  Number of optical 1  assemblies:  from -20°C to +35°C.  ambiente:	W system:	41.6	MacAdam Step:	2
Luminous efficiency (Im/W, real value):  Im in emergency mode:  Total light flux at or above an angle of 90° [Lm]:  Light Output Ratio (L.O.R.)  Beam angle [°]:  Lamp code:  LED  Number of plamps for optical 1  assembly:  ZVEI Code:  LED  Number of optical 1  assemblies:  Intervallo temperatura from -20°C to +35°C.  ambiente:	Im source:	5500	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
real value):  Im in emergency mode:  Total light flux at or above an angle of 90° [Lm]:  Light Output Ratio (L.O.R.)  Beam angle [°]:  Number of lamps for optical assembly:  ZVEI Code:  LED  Number of optical 1  assemblies:  Intervallo temperatura from -20°C to +35°C.  ambiente:	W source:	35	Life Time LED 2:	100,000h - L80 - B10 (Ta 40°C)
Im in emergency mode:     -     assembly:       Total light flux at or above an angle of 90° [Lm]:     0     ZVEI Code:     LED       Number of optical     1       assemblies:       [%]:     Intervallo temperatura     from -20°C to +35°C.       Beam angle [°]:     48°	Luminous efficiency (Im/W,	105.7	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]: Light Output Ratio (L.O.R.) 80  Beam angle [°]:  VZEI Code:  Number of optical assemblies: Intervallo temperatura from -20°C to +35°C. ambiente:	real value):		Number of lamps for optical	1
an angle of 90° [Lm]:  Light Output Ratio (L.O.R.) 80  seem angle [°]:  Number of optical 1  assemblies:  Intervallo temperatura from -20°C to +35°C.  ambiente:	Im in emergency mode:	-	assembly:	
Light Output Ratio (L.O.R.) 80 assemblies: [%]: Intervallo temperatura from -20°C to +35°C. Beam angle [°]: 48° ambiente:		0	ZVEI Code:	LED
[%]: Intervallo temperatura from -20°C to +35°C.  Beam angle [°]: 48° ambiente:	an angle of 90° [Lm]:		Number of optical	1
Beam angle [°]: 48° ambiente:	Light Output Ratio (L.O.R.)	80	assemblies:	
	[%]:		Intervallo temperatura	from -20°C to +35°C.
CRI (minimum): 80 Control: DALI / Push Dim	Beam angle [°]:	48°	ambiente:	
	CRI (minimum):	80	Control:	DALI / Push Dim

## Polar

Imax=7948 cd	Lux			
90° 180° 90°	h	d	Em	Emax
	8	7.1	99	123
	16	14.2	25	31
9000	24	21.4	11	14
α=48°	32	28.5	6	8

# Isolux

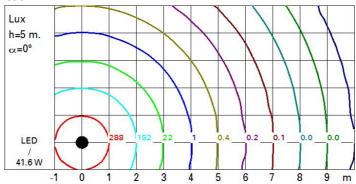

# UGR diagram

Rifled	ct.:										
ceil/cav walls work pl. Room dim		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		EXCHANGE.		viewed		67,207,070		viewed			
		crosswise					endwise				
2H	2H	6.0	6.5	6.3	6.7	6.9	6.0	6.5	6.3	6.7	6.9
	ЗН	5.9	6.3	6.2	6.6	6.9	5.9	6.3	6.2	6.6	6.9
	4H	5.8	6.3	6.2	6.5	6.8	5.8	6.2	6.1	6.5	6.8
	бН	5.8	6.1	6.1	6.5	6.8	5.7	6.1	6.1	6.4	6.8
	HS	5.7	6.1	6.1	6.4	6.8	5.7	6.1	6.1	6.4	6.7
	12H	5.7	6.0	6.1	6.4	6.7	5.7	6.0	6.0	6.4	6.7
4H	2H	5.8	6.2	6.1	6.5	6.8	5.8	6.3	6.2	6.5	6.8
	3H	5.7	6.1	6.1	6.4	6.8	5.7	6.1	6.1	6.4	6.8
	4H	5.6	6.0	6.0	6.3	6.7	5.6	6.0	6.0	6.3	6.7
	6H	5.6	5.8	6.0	6.2	6.7	5.6	5.8	6.0	6.2	6.7
	HS	5.5	5.8	6.0	6.2	6.6	5.5	5.8	6.0	6.2	6.6
	12H	5.5	5.7	5.9	6.1	6.6	5.5	5.7	5.9	6.1	6.6
нв	4H	5.5	5.8	6.0	6.2	6.6	5.5	5.8	6.0	6.2	6.6
	6H	5.4	5.6	5.9	6.1	6.6	5.4	5.7	5.9	6.1	6.6
	HS	5.4	5.6	5.9	6.0	6.5	5.4	5.6	5.9	6.0	6.5
	12H	5.3	5.5	5.8	6.0	6.5	5.3	5.5	5.8	6.0	6.5
12H	4H	5.5	5.7	5.9	6.1	6.6	5.5	5.7	5.9	6.1	6.6
	6H	5.4	5.6	5.9	6.0	6.5	5.4	5.6	5.9	6.0	6.5
	HS	5.3	5.5	5.8	6.0	6.5	5.3	5.5	5.8	6.0	6.5
Varia	tions wi	th the ol	oserverp	noitien	at spacir	ng:					
S =	1.0H		6	.4 / -8	.0				.4 / -8.		
	1.5H	9.2 / -9.6				9.2 / -9.6					
	2.0H		11	2 / -1	8.0			11	.2 / -10	8.0	