

Last information update: November 2024

Product configuration: Q369+Q418.12

Q369: Minimal initial moduleGeneral Up/Down LightL 2397

Q418.12: Plate - General Up / Down Light - ON-OFF - Warm LED - L 1196 - 51.6W 5134lm - 3000K - Aluminium

**Product code**

Q369: Minimal initial moduleGeneral Up/Down LightL 2397

Technical description

Initial profile in extruded aluminium - Minimal (frameless) version for flush with ceiling mounting and up-down emission; methacrylate opal lower screen (diffused general light); screen set up for connecting several lengths by overlapping. Methacrylate diffusing screen for upper emission. Light flow split into approx. 70% down / 30% up.

Installation

Installation can be pendant-mounted using suitable accessories to be ordered separately. The initial modules can be used individually for various applications if completed with accessory caps and the required LED module.

Colour

White (01) | Aluminium (12)

Weight (Kg)

5.9

Mounting

wall surface|ceiling pendant


Wiring

Set up to house the up-down LED modules required by the system.

Notes

Take care with the system configuration. To make continuous lines of lighting, use the intermediate modules. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations

**Product code**

Q418.12: Plate - General Up / Down Light - ON-OFF - Warm LED - L 1196 - 51.6W 5134lm - 3000K - Aluminium **Attention! Code no longer in production**

Technical description

LED module set up for housing in initial or intermediate system profiles - up + down emission. Electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Warm LED.

Installation

Module insertion on profiles facilitated by a quick coupling system.

Colour

Indeterminate (00) | White (01)

Weight (Kg)

1.4

Wiring


Quick coupling terminal block connection to simplify connections between the luminaires. LED module complete with integrated control gear.

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	10268	Colour temperature [K]:	3000
W system:	103.3	MacAdam Step:	3
lm source:	15100	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	90	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	99.4	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	2909	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	68	Number of optical assemblies:	1
CRI (minimum):	80		

Polar

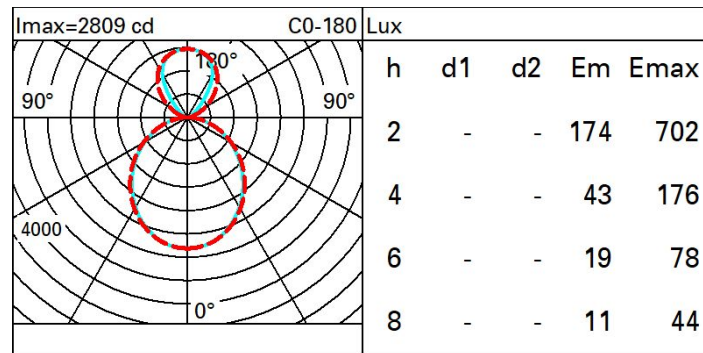

Isolux

