

Last information update: May 2024

Product configuration: Q364+Q415.12

Q364: Minimal initial moduleGeneral Down LightL 2397

Q415.12: Plate - General Down Light - Warm LED - DALI - L 1196 - 33W 3737lm - 3000K - Aluminium

**Product code**

Q364: Minimal initial moduleGeneral Down LightL 2397

Technical description

Initial profile in extruded aluminium - Minimal (frameless) version for flush with ceiling mounting and up-down emission; methacrylate opal screen (diffused general light); screen set up for connecting several lengths by overlapping.

Installation

Installation can be recessed, surface, ceiling and pendant-mounted using suitable accessories to be ordered separately. The initial modules can be used individually for various applications if completed with accessory caps and the required LED module.

Colour

White (01) | Aluminium (12)

Weight (Kg)

5.9

Mounting

ceiling recessed|wall surface|ceiling surface|ceiling pendant

Wiring

Set up to house the LED modules required by the system.

Notes

Take care with the system configuration. To make continuous lines of lighting, use the intermediate modules. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations



IP20

**Product code**

Q415.12: Plate - General Down Light - Warm LED - DALI - L 1196 - 33W 3737lm - 3000K - Aluminium

Technical description

LED module set up for housing in initial or intermediate system profiles - down emission. DALI dimmable electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Warm LED.

Installation

Module insertion on profiles facilitated by a quick coupling system.

Colour

Indeterminate (00)

Weight (Kg)

1.37

Wiring

Quick coupling terminal block connection to simplify connections between the luminaires. LED module complete with integrated control gear.

Complies with EN60598-1 and pertinent regulations




IP20

**Technical data**

Im system:	7511	Colour temperature [K]:	3000
W system:	66	MacAdam Step:	3
Im source:	10150	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	60	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	113.8	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	74	Number of optical assemblies:	1
CRI (minimum):	80		

Polar

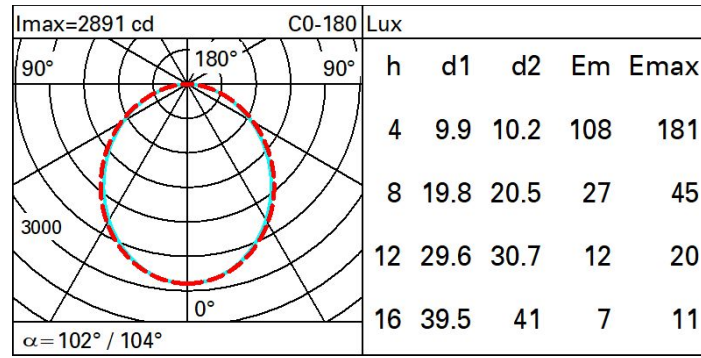

Isolux

