


Last information update: October 2024

Product configuration: BC15

BC15: Down light wall-mounting LED neutral white - medium optic

**Product code**BC15: Down light wall-mounting LED neutral white - medium optic **Attention! Code no longer in production****Technical description**

Lighting system with down-light emission designed to use monochromatic Neutral White (4200K) LEDs with medium adjustable optic ($\pm 15^\circ$ around vertical axis and 180° around horizontal plane). Optical assembly, wall arm and frame made of diecast aluminium alloy, with acrylic liquid paint treatment with high resistance to atmospheric agents and UV rays; plastic cover for wall arm; tempered transparent sodium calcium closing glass, 4 mm thick, siliconed to frame. Provided with fast-coupling closing system between frame, optical assembly and wall arm, without the use of tools. Internal silicone watertight gaskets. Complete with circuit with 6 monochromatic Neutral White (4200K) power LEDs, Medium (M) optics with plastic lens, and built-in electronic ballast. Double black polyamide PG11 cable clamp for through wiring (suitable for cables with $6.5 \div 11$ mm diameter). Three-pole terminal board designed for through earth wire. Connection between terminal board and control gear via cables with fast-coupling connectors. Various accessories available: refractor for elliptical distribution, diffusing prismatic glass and chromatic filters. All external screws are made of stainless steel A2.

Installation

Wall installation with down-light luminous emission.

Colour

Grey (15)

Weight (Kg)

1.8

Mounting

wall arm|wall surface

WiringControl gear with $220 \div 240$ Vac 50/60 Hz electronic ballast.**Notes**

Insulation class II, available with Insulation Class I (on demand). Spare parts for LED circuit and electronic control gear available for extraordinary maintenance. Anti-theft fastening system with torx screws between wall arm and optical assembly on demand.

Complies with EN60598-1 and pertinent regulations


**Technical data**

Im system:	453	CRI:	80
W system:	5.8	Colour temperature [K]:	4000
Im source:	620	MacAdam Step:	3
W source:	4	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	78	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	73	Number of optical assemblies:	1
Beam angle $[\alpha]$:	32°	Intervallo temperatura ambiente:	from -20°C to $+35^\circ\text{C}$.

Polar

Imax=1357 cd		Lux			
		h	d	Em	Emax
	90°	4	2.3	67	85
	180°	8	4.6	17	21
	0°	12	6.9	7	9
	32°	16	9.2	4	5

Isolux

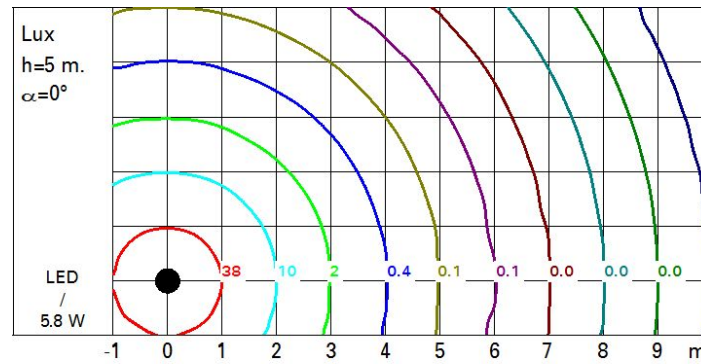

UGR diagram

Corrected UGR values (at 620 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	0.4	0.9	0.6	7.2	7.4	0.4	0.9	0.6	7.2	7.4
	3H	0.3	0.8	0.6	7.1	7.4	0.3	0.8	0.6	7.1	7.3
	4H	0.3	0.8	0.6	7.1	7.4	0.2	0.7	0.6	7.0	7.3
	6H	0.3	0.7	0.6	7.0	7.4	0.2	0.6	0.5	6.9	7.2
	8H	0.3	0.7	0.6	7.0	7.4	0.1	0.5	0.5	6.9	7.2
	12H	0.2	0.6	0.6	7.0	7.3	0.1	0.5	0.5	6.8	7.2
4H	2H	0.2	0.7	0.6	7.0	7.3	0.3	0.8	0.6	7.1	7.4
	3H	0.2	0.6	0.6	6.9	7.3	0.3	0.7	0.6	7.0	7.3
	4H	0.2	0.6	0.6	6.9	7.3	0.2	0.6	0.6	6.9	7.3
	6H	0.2	0.5	0.6	6.9	7.3	0.2	0.5	0.6	6.9	7.3
	8H	0.2	0.5	0.6	6.9	7.3	0.1	0.4	0.6	6.8	7.3
	12H	0.2	0.4	0.6	6.9	7.3	0.1	0.3	0.5	6.8	7.2
8H	4H	0.1	0.4	0.6	6.8	7.3	0.2	0.5	0.6	6.9	7.3
	6H	0.2	0.4	0.6	6.8	7.3	0.2	0.4	0.6	6.9	7.3
	8H	0.2	0.4	0.6	6.8	7.3	0.2	0.4	0.6	6.8	7.3
	12H	0.2	0.3	0.7	6.8	7.3	0.1	0.3	0.6	6.8	7.3
12H	4H	0.1	0.3	0.5	6.8	7.2	0.2	0.4	0.6	6.9	7.3
	6H	0.1	0.3	0.6	6.8	7.3	0.2	0.4	0.6	6.8	7.3
	8H	0.1	0.3	0.6	6.8	7.3	0.2	0.3	0.7	6.8	7.3
Variations with the observer position at spacing:											
S =		1.0H	4.0	/ -4.7			4.0	/ -4.7			
		1.5H	6.6	/ -5.8			6.6	/ -5.8			
		2.0H	8.6	/ -6.3			8.6	/ -6.3			