





### Technical data

Im system:	5670	Voltage [Vin]:	230
W system:	37.7	Lamp code:	LED
Im source:	-	Number of lamps for optical assembly:	1
W source:	-	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	150.4	Number of optical assemblies:	1
Im in emergency mode:	-	Intervallo temperatura ambiente:	from -40°C to 35°C.
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	100	Inrush current:	26 A / - μs
CRI (minimum):	70	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 17 luminaires B16A: 28 luminaires C10A: 29 luminaires C16A: 47 luminaires
Colour temperature [K]:	3000	Minimum dimming %:	10
MacAdam Step:	3	Overvoltage protection:	10kV Common mode & 6kV Differential mode
Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)	Control:	Middle of the night

### Polar

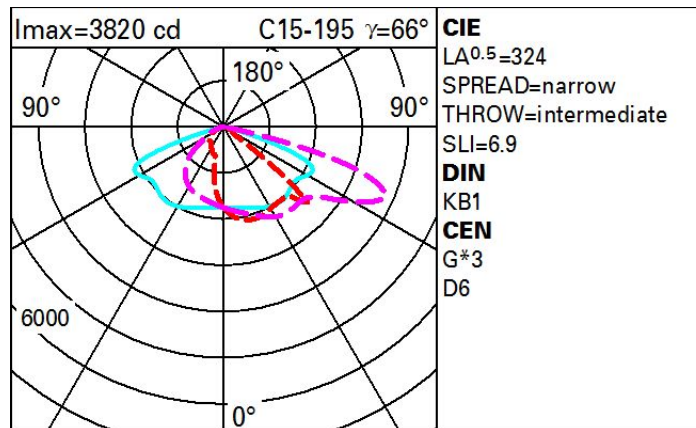

### Isolux

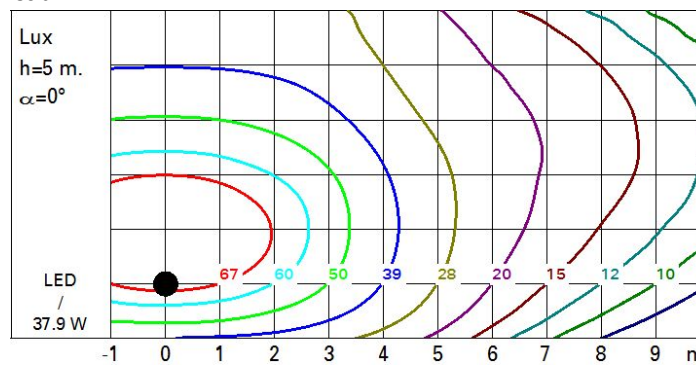

Utilisation factors

