


Last information update: April 2024

Product configuration: P055

P055: spotlight- warm white - 30° optic

**Product code**P055: spotlight- warm white - 30° optic **Attention! Code no longer in production****Technical description**

Adjustable spotlight with adapter for installation on a mains voltage track. Die-cast aluminium optical assembly and brackets, the back of the product is slightly rounded and made of a thermoplastic material. Spotlight double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Mechanical aiming locks both for rotation about the vertical axis and tilting relative to the horizontal plane. Equipped with electronic ballast. Luminaire complete with C.O.B. technology LED unit in warm white colour 3000K. Option of installing a flat accessory that can be either an elliptical distribution refractor, a soft lens filter or a louver.

Installation

on an electrified track or special base

Colour

White (01) | Black (04) | White / Chrome (E4)

Weight (Kg)

1.74

Mounting

three circuit track

Wiring

product complete with electronic components

Complies with EN60598-1 and pertinent regulations


**Technical data**

Im system:	4020.3	CRI:	80
W system:	35.5	Colour temperature [K]:	3000
Im source:	5100	MacAdam Step:	2
W source:	32	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	113.3	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	30°		

Polar

Imax=13139 cd		Lux			
		h	d	Em	Emax
	180°	2	1.1	2772	3285
	90°	4	2.1	693	821
	0°	6	3.2	308	365
		8	4.3	173	205
	α = 30°				

Isolux

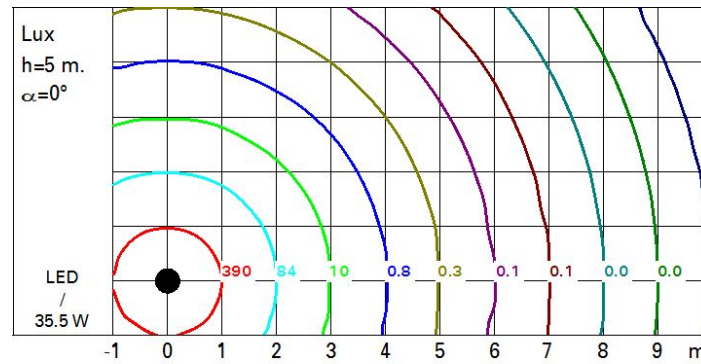

UGR diagram

Corrected UGR values (at 5100 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	4.3	4.8	4.6	5.0	5.3	4.3	4.8	4.6	5.0	5.3
	3H	4.5	5.0	4.8	5.2	5.5	4.3	4.7	4.6	5.0	5.3
	4H	4.6	5.0	4.9	5.3	5.6	4.3	4.7	4.6	5.0	5.3
	6H	4.7	5.1	5.1	5.5	5.8	4.2	4.6	4.6	4.9	5.3
	8H	4.8	5.2	5.1	5.5	5.8	4.2	4.6	4.6	4.9	5.2
	12H	4.8	5.2	5.2	5.5	5.9	4.2	4.5	4.5	4.9	5.2
4H	2H	4.3	4.7	4.6	5.0	5.3	4.6	5.0	4.9	5.3	5.6
	3H	4.6	4.9	4.9	5.3	5.6	4.7	5.1	5.1	5.4	5.8
	4H	4.8	5.1	5.2	5.5	5.8	4.8	5.1	5.2	5.5	5.8
	6H	5.0	5.3	5.4	5.7	6.1	4.8	5.1	5.2	5.5	5.9
	8H	5.1	5.4	5.5	5.8	6.2	4.8	5.1	5.2	5.5	5.9
	12H	5.1	5.4	5.6	5.8	6.3	4.8	5.0	5.2	5.4	5.9
8H	4H	4.8	5.1	5.2	5.5	5.9	5.1	5.4	5.5	5.8	6.2
	6H	5.1	5.4	5.6	5.8	6.3	5.2	5.4	5.7	5.9	6.4
	8H	5.3	5.5	5.8	5.9	6.4	5.3	5.5	5.8	5.9	6.4
	12H	5.4	5.6	5.9	6.0	6.6	5.3	5.5	5.8	6.0	6.5
12H	4H	4.8	5.0	5.2	5.4	5.9	5.1	5.4	5.6	5.8	6.3
	6H	5.1	5.3	5.6	5.8	6.3	5.3	5.5	5.8	6.0	6.5
	8H	5.3	5.5	5.8	6.0	6.5	5.4	5.6	5.9	6.0	6.6
Variations with the observer position at spacing:											
S =		1.0H	3.9 / -2.1				3.9 / -2.1				
		1.5H	6.3 / -2.5				6.3 / -2.5				
		2.0H	8.2 / -2.7				8.2 / -2.7				