

Laser Blade XS

iGuzzini

iGuzzini

Last information update: August 2025

Product configuration: QJ39
QJ39: Minimal 15 cells - Flood beam - LED

Product code
QJ39: Minimal 15 cells - Flood beam - LED

QJ39: Minimal 15 cells - Flood beam - LED

Technical description
Linear miniaturised recessed luminaire with 15 optical elements for LED lamps - fixed optic. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient luminous flux and a high level of controlled glare visual comfort. Main body with die-cast aluminium radiant surface, minimal (frameless) version for mounting flush with the ceiling. For recessed installation in a false ceiling a specific adapter is required that is available with a separate item code. Metallised, thermoplastic, high definition Opti Beam reflector, integrated in a set-back position in the anti-glare screen. Supplied with a dimmable DALI power supply unit connected to the luminaire.

Linear miniaturised recessed luminaire with 15 optical elements for LED lamps - fixed optic. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient luminous flux and a high level of controlled glare visual comfort. Main body with die-cast aluminium radiant surface, minimal (frameless) version for mounting flush with the ceiling. For recessed installation in a false ceiling a specific adapter is required that is available with a separate item code. Metallised, thermoplastic, high definition Opti Beam reflector, integrated in a set-back position in the anti-glare screen. Supplied with a dimmable DALI power supply unit connected to the luminaire.

Installation
The luminaire is recessed in the specific adapter (QJ93) by means of a steel wire spring, previously installed on the ceiling that can be 12.5 / 15 / 20 mm thick. A special protective sheath allows finishing operations on the plasterboard to be simplified and speeded up.

The luminaire is recessed in the specific adapter (QJ93) by means of a steel wire spring, previously installed on the ceiling that can be 12.5 / 15 / 20 mm thick. A special protective sheath allows finishing operations on the plasterboard to be simplified and speeded up.

Colour	Weight (Kg)
White (01) Black (04) Gold (14)* Burnished chrome (E6)*	0.59
* Colours on request	

* Colours on request

Weight (Kg)	0.59
-------------	------

0.59

* Colours on request

Mounting	wall recessed/ceiling recessed
----------	--------------------------------

wall recessed|ceiling recessed

Wiring
On the power supply unit with terminal board included.

On the power supply unit with terminal board included.

Notes

The special steel wire spring provided is required to facilitate the eventual extraction of the recessed body once it has been inserted.

The special steel wire spring provided is required to facilitate the eventual extraction of the recessed body once it has been inserted.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	2698	Colour temperature [K]:	4000
W system:	33.8	MacAdam Step:	2
Im source:	3250	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	30	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	79.8	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	83	Number of optical assemblies:	1
Beam angle [°]:	43°	Control:	DALI-2
CRI (minimum):	90		


Polar

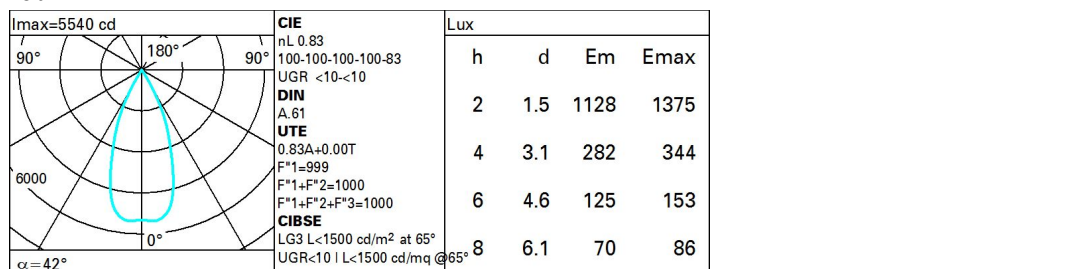

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	80	77	76	79	77	76	74	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	87	85	83	100

Luminance curve limit

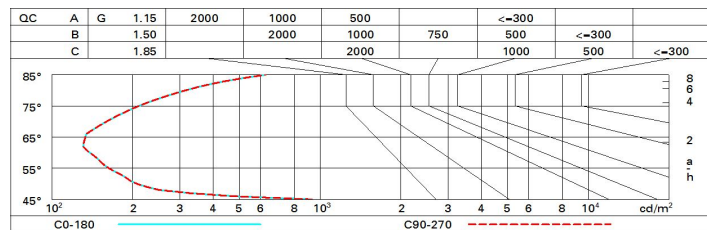

UGR diagram

Corrected UGR values (at 3250 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	7.8	8.3	8.1	8.5	8.7	7.8	8.3	8.1	8.5	8.7
	3H	7.7	8.1	8.0	8.4	8.6	7.7	8.1	8.0	8.4	8.6
	4H	7.6	8.0	7.9	8.3	8.6	7.6	8.0	7.9	8.3	8.6
	6H	7.5	7.9	7.9	8.2	8.5	7.5	7.9	7.9	8.2	8.5
	8H	7.5	7.8	7.8	8.2	8.5	7.5	7.8	7.8	8.2	8.5
12H	7.5	7.8	7.8	8.1	8.5	7.4	7.8	7.8	8.1	8.5	
4H	2H	7.6	8.0	7.9	8.3	8.6	7.6	8.0	7.9	8.3	8.6
	3H	7.4	7.8	7.8	8.1	8.5	7.4	7.8	7.8	8.1	8.5
	4H	7.3	7.7	7.7	8.0	8.4	7.3	7.7	7.7	8.0	8.4
	6H	7.3	7.5	7.7	7.9	8.3	7.3	7.5	7.7	7.9	8.3
	8H	7.2	7.5	7.7	7.9	8.3	7.2	7.5	7.7	7.9	8.3
12H	7.2	7.4	7.6	7.8	8.3	7.2	7.4	7.6	7.8	8.3	
8H	4H	7.2	7.5	7.7	7.9	8.3	7.2	7.5	7.7	7.9	8.3
	6H	7.1	7.3	7.6	7.8	8.3	7.1	7.3	7.6	7.8	8.3
	8H	7.1	7.3	7.6	7.7	8.2	7.1	7.3	7.6	7.7	8.2
	12H	7.0	7.2	7.5	7.7	8.2	7.0	7.2	7.5	7.7	8.2
12H	4H	7.2	7.4	7.6	7.8	8.3	7.2	7.4	7.6	7.8	8.3
	6H	7.1	7.2	7.6	7.7	8.2	7.1	7.3	7.6	7.7	8.2
	8H	7.0	7.2	7.5	7.7	8.2	7.0	7.2	7.5	7.7	8.2
Variations with the observer position at spacing:											
S =	1.0H	7.0 / -14.5					7.0 / -14.5				
	1.5H	9.8 / -14.7					9.8 / -14.7				
	2.0H	11.8 / -14.8					11.8 / -14.8				